



City of Chicago  
Department of Public Health  
333 South State Street, Room 200  
Chicago, IL 60604  
3127453152

**Revised**

**FOR OFFICE USE ONLY**

Facility # 2019742  
Permit # 02400-2019INS  
Request Rec'd 12/26/2019  
Amended Date  
Approval Date 12/30/2019  
Permit Expires 7/1/2020

**Permit for INSTALLATION of Underground Storage Tank(s) and Piping for Petroleum and Hazardous Substances.**

Permission to install underground storage tank(s) or piping is hereby granted. Such installation must be in complete accordance with acceptable materials as specified in the Federal Register, Part II Environmental Protection Agency, 40 CFR Parts 280 and 281, and also with all sections of 41 Illinois Administrative Code, Parts 174, 175 and 176. The contractor the permit was issued to or an employee of that contractor (this does not include a subcontractor) shall submit a required job schedule for installation of underground storage tank(s) to the Office of the State Fire Marshal, Division of Petroleum and Chemical Safety. **THIS PERMIT IS VALID FOR SIX MONTHS FROM THE APPROVAL DATE.**

<p><b>(1) <u>OWNER OF TANKS</u></b> - Corporation, partnership, or other business entity:</p> <p>Enterprise Leasing Company of Chicago, LLC 1050 Lombard Road Lombard, IL 60148  Contact: Stephen Dattilo (630) 693-2944</p>	<p><b>(2) <u>FACILITY</u></b> - name and address where tanks are located:</p> <p>EH1-15CC-Admin 580 Bessie Coleman Drive/ Bldg 580 Chicago O'Hare Field Chicago, IL 60614  Contact: Philip Engle (630) 693-2944</p>
----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

**(3) INSTALLATION OF TANKS:**

- (a) Number and size of tanks being installed: (TK # 9) - 15,000*
- (b) Type of tank(s): (TK # 9) Tank - Fiberglass Double Wall XERXES*
- (c) Type of piping: (TK # 9) Piping - Fiberglass Double Wall Ameron Dualoy 3000/LCX, (TK # 9) Piping - Ball Valves, (TK # 9) Piping - Shear Valves, (TK # 9) Piping - Single Wall STP/Tanktop Sump*
- (d) Product to be stored in each tank: (TK # 9) - Gasoline*
- (e) Type of leak detection being used:*
  - Tank: (TK # 9) Leak Detect - Tank - Automatic Tank Gauging Veeder Root TLS 450 Plus, (TK # 9) Leak Detect - Tank - Hydrostatic Reservoir Sensors Interstitial Monitoring*
  - Piping: (TK # 9) Leak Detect - Piping - Mechanical Pressurized Line Leak Detection, (TK # 9) Leak Detect - Piping - Non-Discriminating Sump Sensor with positive shutdown*
- (f) Corrosion Protection being used:*
  - Tank: (TK # 9) Corrosion Prot - Tank - Fiberglass Non-Corrosive*
  - Piping: (TK # 9) Corrosion Prot - Piping - Fiberglass Non-Corrosive*
- (g) Spill containment devices, piping and dispenser containment devices: (TK # 9) Spill Contain Device - Single Wall Spill Bucket*
- (h) Overfill prevention devices: (TK # 9) Overfill Prev Device - Overfill Drop Tube Valve*

- (4)** The owner must notify this Office when completion of tank installation has occurred, on the Notification for Underground Storage Tank Form and the licensed contractor must submit the required job schedule for installation to the OSFM prior to the work being performed. Both forms can be obtained at [www.sfm.illinois.gov](http://www.sfm.illinois.gov) or by calling (217)785-1020.

- (5) GENERAL REQUIREMENTS** : There shall be a minimum of two manufactured slotted or perforated observation wells of at least 4 inches in diameter, installed in each new tank field of tanks larger than 1000 gallons and one well for tanks less than 1000 gallons. A water tight containment shall be installed under all dispensers and at submersible pumps. A hydrostatic test must be performed on all containments. All steel piping for vents, risers, and fills in contact with the ground, backfill, or water shall be dielectrically wrapped or coated. A positive shut off valve shall be installed on pressurized product lines, at the submersibles, or installed at the tank for all suction piping systems. Vent piping is required to be tested from tank to grade level. All steel flex connectors in contact with ground, backfill or water shall have corrosion protection.

**(6) SPECIAL CONTINGENCIES :**


Revision Reason: Revising permit to reflect correct tank ID. Original permit was for tank id #10 but there is no tank #10, it should have reflected tank id #9.

**(6) PERSON, FIRM OR COMPANY PERFORMING WORK:**

Crowne Industries, Ltd.  
651 S. Sutton Road #214  
Streamwood, IL 60107

Contact Person: Robert Sumoski  
Phone: (630) 497-9009  
Contractor Registration # IL002345 Exp. 5/16/2020

Sincerely,

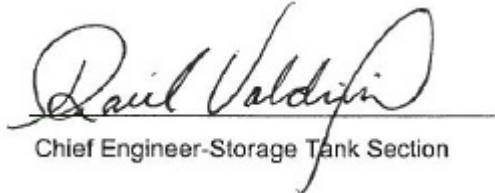

Chief Engineer-Storage Tank Section

Raul Valdivia

**cc:** Storage Tank Safety Specialist  
Division File