

# ENVIRO-LOC™ Flex Fuel Conventional Curb Pump Hose Assemblies



## **ENVIRO-LOC™ Flex Fuel Conventional Curb Pump Hose Assemblies**

are highly engineered fuel delivery hoses designed to meet the stringent UL330A requirements for a wide range of ethanol blended gasolines.

## **Customer Benefits:**

- For use with any blend of ethanol gasoline from E0 to E85 applications
- Light weight assembly
- Easy to handle




**Vapor Systems Technologies, Inc.**



**Striving Towards Sustainability**

# ENVIRO-LOC™ Flex Fuel Hose Assemblies Specifications

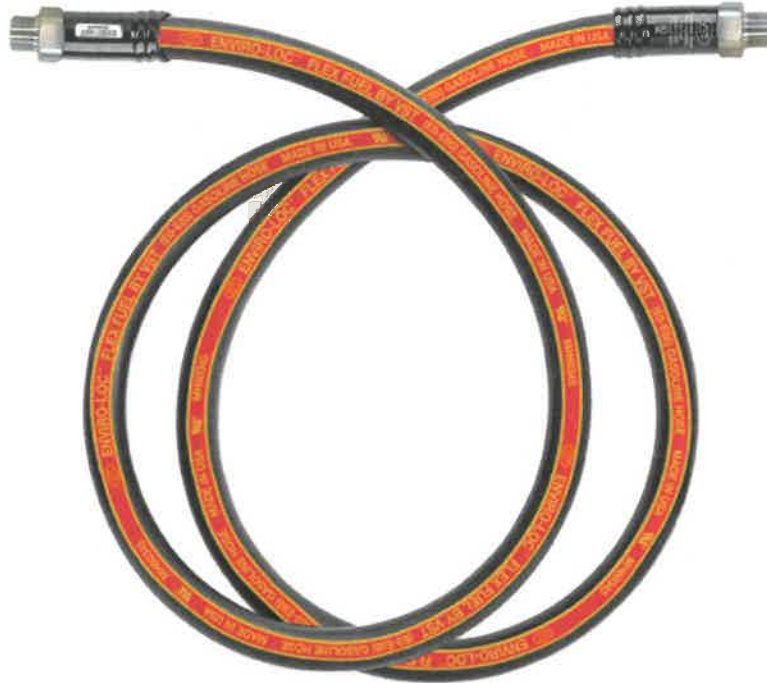

## Tube

- High grade Nitrile (NBR) with superior resistance to refined petroleum products (gasoline) inclusive of alcohol rich fuels containing ethanol ranging from E0 through E85

## Reinforcement

- Wire braid reinforcement adding kink resistance, high working pressure up to 150 PSI, and superior coupling retention

## Cover

- Premium Chlorinated Polyethylene (CPE) for excellent resistance to ozone, UV weathering, cover cracking, and abrasion aimed at promoting longer service life

## Couplings

- 3/4" NPT Stainless Steel (Rigid ONLY)

## Strain Relievers

- Unique vinyl stress reliever for durability at the hose / coupling interface

## Temperature Range

- -40° F to +120° F  
Continuous Service

## Certifications & Listings

- UL 330A Listed Hose Assemblies

## ENVIRO-LOC™ Flex Fuel Hose & Coupling Characteristics

Part No. Series	V34FF
Nom. ID (In.)	3/4"
Nom OD (In.)	1.110"
Braid	Wire
Weight (Lb./Ft.)	.044 lb.
Min. Bend Radius (In.)	4.0"
Coupling End Style	3/4" NPT (Rigid ONLY)

## Warranty

- All VST products are covered under the company warranty, which may be found at [www.vsthose.com](http://www.vsthose.com)



## Vapor Systems Technologies, Inc.

650 Pleasant Valley Drive  
Springboro, Ohio 45086 (USA)  
Toll Free: 1-888-878-4673

Phone: 937-704-9333  
Fax: 937-704-9443  
[www.vsthose.com](http://www.vsthose.com)