



Franklin Electric
FUELING SYSTEMS

DEFENDER SERIES® SPILL CONTAINERS

Defender Series® five gallon spill containers combine years of knowledge and experience in forecourts across the globe to represent the best defense in spill containment. Proactively protecting a site from the dangers of fugitive emissions during fuel delivery can save station owners both time and money by avoiding remediation due to fuel leakage. Available in both grade level and below grade level models to meet the needs of your application and preference, the complete lineup of Defender Series® spill containers provides a durable, easy-to-install, and simple-to-maintain and service spill containment solution for any environment and any application.

HIGHLIGHTS

- Available in both grade level and below grade level models to meet the needs of your application and preference.
- Double wall protection complete with integrated visual interstitial integrity monitor or electronic sensor monitoring options for the secondary containment space (single wall grade level option available).
- Visual interstitial monitor facilitates efficient monthly inspections of the integrity of the secondary containment space during walk-through inspections.
- Electronic sensor monitor provides active integrity monitoring of the secondary containment space, providing immediate alarm of liquid when paired with an automatic tank gauge.
- Drop tube adapter ensures a vapor tight seal and easy in and out of drop tube / overfill prevention valve during installation or maintenance.
- Drain valve option, designed to meet CARB leak rate requirements, drains any spilled fuel into the tank.
- Grade level spill containers feature a rugged concrete ring, sturdy snow plow ring, and cast iron lid to deflect forecourt traffic. Their integrated liquid dam and gasketed lid prevent water entry. The container is housed inside a ribbed roto-molded PE gravel guard.
- Below grade spill containers feature a flush fiberglass composite manway lid allowing forecourt traffic to pass cleanly over its top. The gasketed lock-down cover seals water out. The container is protected by a solid steel manway skirt.
- Grade level spill containers offer variable installation height adjustment making it easy to ensure proper installation.
- Below grade spill containers install easily, and cleanly into the included 18" manway for simple installation.




SPECIFICATIONS

Components


- | | |
|-------------------------|-----------------------------|
| ■ Primary containment | 6 Visual monitor |
| ■ Secondary containment | 7 Electronic sensor monitor |
| 1 Adapter cap* | 8 Lock down lid |
| 2 Swivel adapter* | 9 18" manway |
| 3 Nipple* | 10 Fiberglass manway lid |
| 4 Drop tube adapter | 11 Gravel guard |
| 5 Drain | 12 Cast iron gasketed lid |

* Sold separately

Below Grade

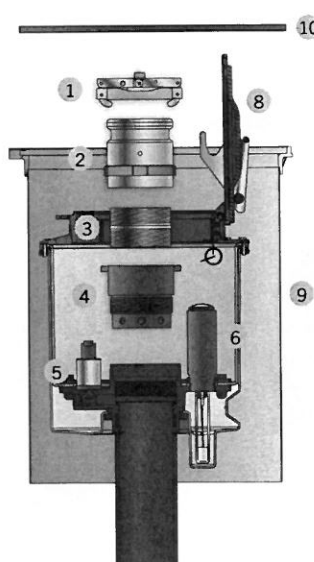


Grade Level

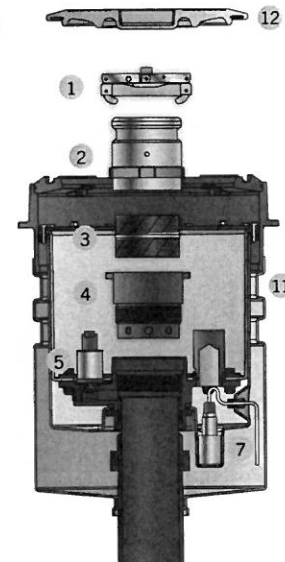

SPECIFICATIONS CONTINUED

UL Listed MH62435	Below grade, and grade level version with CI-GKT cover
ULC Listed	Grade level CI-GKT versions only
CARB approved	Grade level only
H20 and HS20 load ratings	Covers are engineered and tested to meet or exceed load ratings
UL2447 Listed	For fuels formulated in accordance with 40CFR80, "Regulation of Fuels and Fuel Additives," and meeting the following ASTM fuel specifications and blend limit: - ASTM D975 diesel with or without biodiesel blends up to 5% (B5) - ASTM D7467 diesel with biodiesel blends between 6% - 20% (B6 - B20) - ASTM D4814 gasoline with ethanol blends up to 10% (E10) - ASTM D5798 high-blend ethanol, with ethanol/gasoline blends between 51% - 83% (E51 - E83) — commercially known as "E-85" - Mid-range ethanol, with ethanol/gasoline blends of ASTM D4814 and ASTM D5798 blends between 11% - 50% (E11 - E50) - Biodiesel up to 5% (B5) - Biodiesel up to 20% (B20) - Biodiesel at 97% - 100% (B99/B100) - All ASTM biofuel blends

Grade Level Spill Container Dimensions

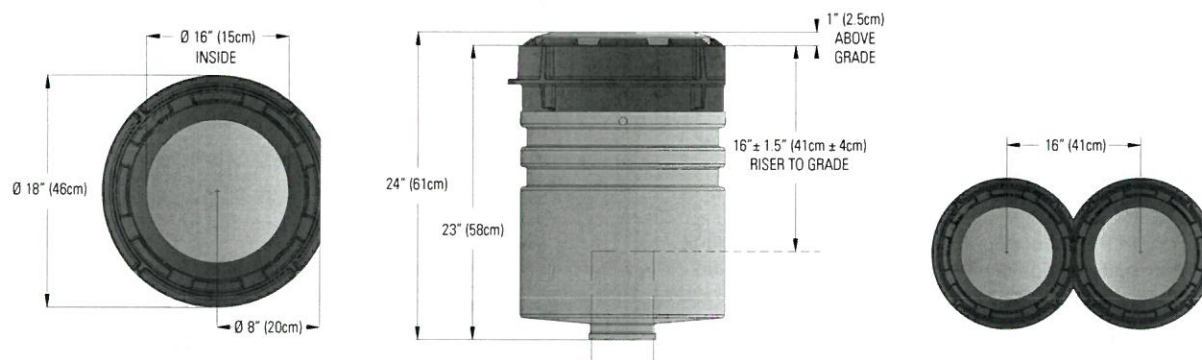

Below Grade Spill Container Dimensions

