

EXTRACTOR VENT VALVES

Extractor vent valves are designed to fit into a 4" tank opening on an underground storage tank. Several outlet sizes are available to accommodate manifolded tank lines and Stage II vapor recovery installations.

HIGHLIGHTS

- E-coated bodies are fully compatible for alcohol/gas blends and Biodiesel.


Model	Description 4" X A X B	A		B		C		Weight	
		In	mm	In	mm	In	mm	Lbs	Kg
31040011	4" x 2" extractor valve w/o adaptor-NPT	4.00	102.00	2.00	51.00	n/a	n/a	13.00	5.90
31140011	4" x 3" extractor valve w/o adaptor-NPT	4.00	102.00	3.00	76.00	n/a	n/a	13.00	5.90
33040011	4" x 3" x 2" extractor valve w/o adaptor-NPT	4.00	102.00	3.00	76.00	2.00	51.00	18.00	8.16
33140011	4" x 3" x 3" extractor valve w/o adaptor-NPT	4.00	102.00	3.00	76.00	3.00	76.00	15.00	6.80
34040011	4" x 2" x 2" extractor valve w/o adaptor-NPT	4.00	102.00	2.00	51.00	2.00	51.00	17.00	7.71
34040041	4" x 2" x 2" extractor valve w/o adaptor-BSPP	4.00	102.00	2.00	51.00	2.00	51.00	17.00	7.71
31040042	4" x 2" extractor valve w/o adaptor-BSPT	4.00	102.00	2.00	51.00	n/a	n/a	13.00	5.90
31140042	4" x 3" extractor valve w/o adaptor-BSPT	4.00	102.00	3.00	76.00	n/a	n/a	13.00	5.90
33040042	4" x 3" x 2" extractor valve w/o adaptor-BST	4.00	102.00	3.00	76.00	2.00	51.00	18.00	8.16

Extractor Vent Valve Accessories

Hard Coated Aluminum Plug with O-Ring Seal

Plug used for isolating vent piping from tank during testing.

Model	Description	Weight	
		Lbs	Kg
39120101	4" test plug	3.60	1.63

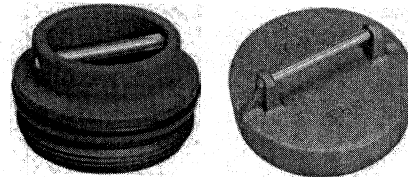

Adapters, for use with EBW® Ball Floats

Model	Description	Weight	
		Lbs	Kg
30822802	ADPT 2" NPT, AGB, spare	1.15	0.52
30822803	ADPT 3" NPT, AGB, spare	1.65	0.75


4" Pipe Cap


Model	Description	Weight	
		Lbs	Kg
76020101	Brass, NPSM	4.60	2.09
76020131	Brass, BSPP	4.60	2.09
770201023	4" spare gasket	4.60	2.09

5' Extractor Wrench

Five-foot extractor wrench works on all EBW® extractor vent valves for removing extractor cage assemblies and inserting test plugs.

Model	Description	Weight	
		Lbs	Kg
32110001	5' extractor wrench	14.00	6.35

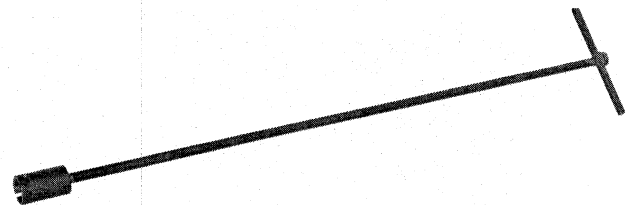

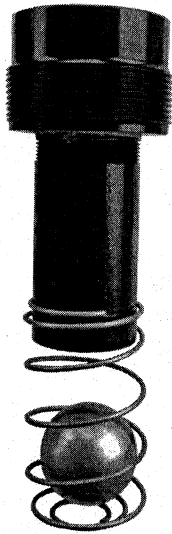

BALL FLOAT VENT VALVE

Ball float vent valves are used in conjunction with extractor vent valves in the Stage I vapor riser or tank vent lines on underground storage tanks. The ball float vent valve will restrict vapor venting should a full tank condition occur and protect against product missing and vapor locks due to vent pipe flooding. All ball floats are made of materials fully compatible with alcohol/gas blends and biofuels (E-85, Biodiesel, B-20).

WARNING: 308 Series float bents should not be used with suction pump systems. For use on gravity drop systems only. Do not use with pump-off unloading. Do not use with coaxial Stage I vapor recovery drop tubes.

HIGHLIGHTS

- Epoxy-coated steel nipple to prevent dissimilar metals from contacting each other.
- Stainless steel ball float is corrosion-resistant for long life.

ORDERING INFORMATION

Model	Nipple Length (in)	Bleed Hole (in)	Thread
308030003	3.00	0.06	NPT
308020205	5.12	0.06	NPT
308020107	7.00	0.06	NPT
308020112	12.00	0.06	NPT
305020116	16.00	0.06	NPT
308020119	19.00	0.06	NPT
308023003	3.00	0.06	BSPT
308023107	7.00	0.06	BSPT
308023112	12.00	0.06	BSPT
308023116	16.00	0.06	BSPT
308023119	19.00*	0.06	BSPT

*Does not include Installation Cage.