




UL listed Flexible Connector by OmegaFlex®

- UL 2039 Listed
- NFPA 30/30A Compliant
- 100% Tested Using a Helium Mass Spectrometer
- Full Vacuum Rated
- Made in the USA
- 1 Year Warranty
- End Fittings are all Stainless Steel Construction
- **Compatible with all Fuel Types, Ethanol's & Bio-Fuels**
- **Compatible with DEF using Standard Flex Connectors**
- Piping is 316L stainless steel, Braid is 304L stainless steel
- Use with DoubleTrac SF flange fittings for time savings installation
- 36 inch long Heat Shrink Isolation Sleeve available in 2 sizes

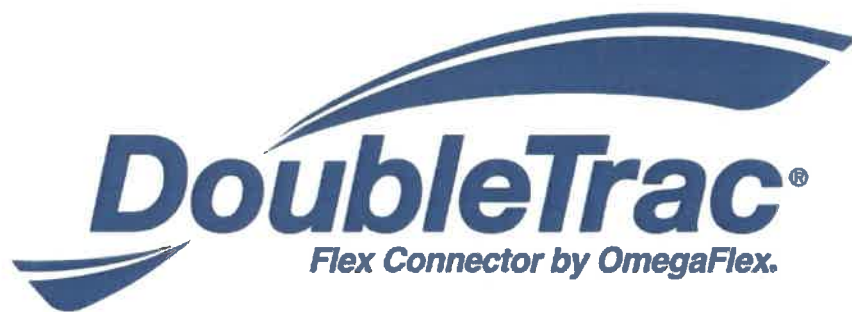

O-FlexConnector Size	Max Allowable Working Pressure	Minimum Centerline Static Bend Radius	Nominal O.D.
3/4"	200psi	4"	1.10"
1"	100psi	4.5"	1.42"
1 1/2"	100psi	4.5"	1.95"
2"	100psi	5"	2.58"
3"	100psi	7.5"	4.01"

3/4" to 3" Hex Male NPT threads both ends 12" to 36" overall lengths


3/4" to 3" Hex Male X SF Flange 12" to 36" overall lengths

3/4" to 3" Hex male X SF Flange with: male or female adapter, clamp and O-ring 12" to 36" overall lengths

1-1/2" and 2" Male and Female NPT X Male and female swivel NPT 12" to 24" overall lengths



CUSTOM LENGTHS UP TO 12 FEET AVAILABLE WITH LEAD TIME

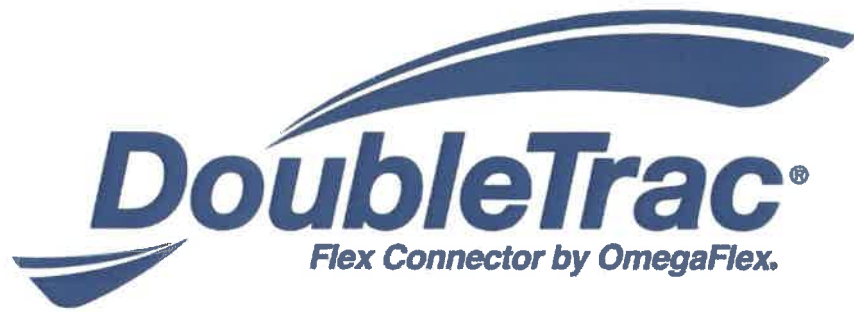

1-1/2 and 2 inch tee's and elbows with SF Flanges, FRP female glue adapter, male or Female NPT adapter. Tee and Elbow can be welded or clamped to the Flex Connector. Overall lengths from 12 inches to 30 inches. Clamps, O-rings, Tees, Elbows, Male, Female NPT Adapters, and Female FRP Adapters are also sold separately. 36 inch long Heat Shrink Isolation Sleeve available in 2 sizes

The Omegaflex advantage:



- United States Metal Hose and Braid Manufacture
- ISO 9001 Quality System
- Hose and Braid Manufactured to ISO 10380 standards
- ASME IX Certified Welders
- Annular Heavy Wall SST T316L Mechanically Formed Hose
- Crush and Damage Resistant
- Thicker Wall Provides Increased Corrosion Resistance
- Stocking Warehouses in PA, TX, and CA



Since 1975, OmegaFlex® has been supplying quality-engineered flexible metal piping products that meet highly-engineered industrial, residential, and commercial applications. OmegaFlex® is publicly traded on the NASDAQ National Market under the symbol "OFLX." The Company sells its products internationally, with operating facilities located in Exton, Pennsylvania and Banbury, England. Our reputation in the marketplace was built through outstanding engineering support and product design, excellent customer service, fully-stocked inventory, and on-time delivery. With over 200 patents registered worldwide, OmegaFlex® supplies proprietary products for a broad number of applications and markets. Utilizing innovative manufacturing technologies, OmegaFlex produces the highest quality and most cost-effective solutions to the industry. As a result of our registration to ISO9001, all new products are subject to complete design review, validation and verification prior to product release. In compliance with our quality program, design and testing, documentation is maintained on all existing and new products manufactured by OmegaFlex. Our dedication to safety and value ensures that we provide only the finest and most economical products in the market.