

XP FLEXIBLE PIPEWORK

APT™ brand XP pipework provides a highly flexible pipework solution that makes installation simple and easy in any weather condition or site configuration. XP pipework can be used in both pressure and suction applications, and is ideal for underground service station fuel delivery systems. The XP pipework system features controlled flexibility, even in low temperatures, permitting fast, easy installation.

Highlights

- Available in 1", 1½", 1¾" and 2" diameters in a variety of coil lengths.
- The D-Series piping is a single wall, direct bury piping.
- The SC-Series piping provides additional environmental security as a secondary contained direct bury pipe.
- XP pipe features a 3 ft. bend radius for all pipe diameters making it one of the most flexible, yet durable fuel pipes available.
- No possibility of piping layer delamination due to the layered piping construction of high-grade material.
- With long coils (1000+ ft.) and simple fittings, XP pipework can be installed quickly without specialized tools in any weather.

Specifications

- Primary layer construction of Nylon 12 - the fuel line material contains no polyethylene.
- Do not store piping in direct sunlight.

Approvals/Certifications

- UL971 listed to the January 2014 standards.
- Biofuel compatible (E85 and Biodiesel).


Ordering Information

Model	Description	Ft.	Reel	Weight	
				Lbs.	Kg
XP-100-SC	1" secondary contained	250	Master	301	136
		500	Master	408	185
		2500	S. Master	1299	589
XP-100-D	1" single wall	250	Master	258	117
		500	Master	320	145
XP-150-SC	1½" secondary contained	100	Master	250	113
		250	Master	333	151
		500	Master	470	213
		1,000	S. Master	789	358
		1,500	S. Master	1061	481
XP-150-D	1½" single wall	100	Master	225	102
		250	Master	270	122
		500	Master	570	259
		1,000	S. Master	536	243
		1,500	S. Master	686	311
XP-175-SC	1¾" secondary contained	100	Master	300	136
		250	Master	405	184
		500	Master	580	263
		1,000	S. Master	1076	488
XP-200-SC	2" secondary contained	250	Master	552	250
		500	S. Master	914	415
XP-200-D	2" single wall	250	Master	427	194
		500	S. Master	664	301

Specifications continued

Components

- ① Interior primary (Nylon 12)
- ② Metallized Mylar
- ③ Nylon Braid
- ④ Exterior Primary (Nylon 12)
- ⑤ Clear Mylar
- ⑥ Secondary Jacket (Nylon 12)
- ⑦ Metallized Mylar
- ⑧ Scuff Guard (Nylon 12)

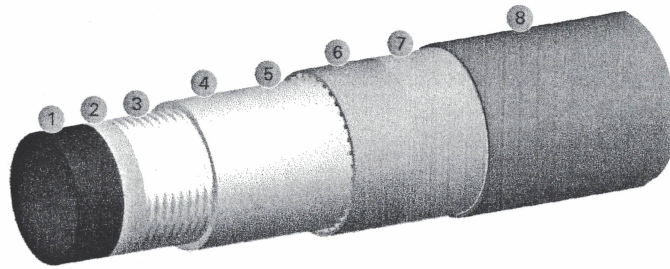

Pipe Dimensions

Model	ID ± 0.010 Primary Layer	OD ± 0.020 Primary Layer	OD ± 0.030 SC Jacket	OD ± 0.030 Scuff Guard	Minimum Bend Radius
XP-100-D	1.00"	1.27"	n/a	n/a	36.00"
XP-100-SC	1.00"	1.27"	1.47"	1.502"	36.00"
XP-150-D	1.40"	1.70"	n/a	n/a	36.00"
XP-150-SC	1.40"	1.70"	1.90"	1.925"	36.00"
XP-175-SC	1.65"	1.95"	2.15"	2.175"	36.00"
XP-200-D	2.04"	2.45"	n/a	n/a	36.00"
XP-200-SC	2.04"	2.45"	2.65"	2.675"	36.00"

Reel Dimensions

Listed as reel diameter × width × hub diameter.

Reel Size	Inches	cm
Master	91 × 31 × 74	231.1 × 78.7 × 188
Super master (S. Mast.)	91 × 49 × 74	231.1 × 124.5 × 188

franklinfueling.com
 3760 Marsh Rd. • Madison, WI 53718, USA
 Tel: +1 608 838 8786 • Fax: +1 608 838 6433
 Tel: USA & Canada +1 800 225 9787 • Tel: UK +44 (0) 1473 243300
 Tel: Mex 001 800 738 7610 • Tel: DE +49 6571 105 308 • Tel: CN +86 10 8565 4566



© 2018 Franklin Fueling Systems, LLC. All Rights Reserved.

FFS-0524 04-18

Piping & Containment Systems