


# 11A® and 11B® Automatic Nozzles

The most trusted conventional nozzles in the world, OPW 11® Series nozzles set the industry standard for durability, safety and user experience in petroleum filling applications. Equipped with automatic shutoff, 11 Series nozzles minimize spills, maximize uptime and ensure a safer, smoother fueling experience for both customers and service technicians.

OPW 11B (Leaded) and 11BP (Unleaded) nozzles are designed to help prevent gasoline/diesel spills in retail and commercial filling applications, including pre-pay, self- and full-service, credit/debit card rewarders, or card-lock systems. The 11B and 11BP will not open until the pumping system is pressurized and close automatically when the pressure is removed (no-pressure, no-flow feature).

These nozzles now feature redesigned ergonomics and improved functionality — all while maintaining the unmatched reliability trusted around the globe, including:

- A patented easy-open feature with a reduced opening force (US Pat: 12,227,408)
- A new ergonomically designed grip featuring a new barrel cover and lever
- A newly designed scuff guard

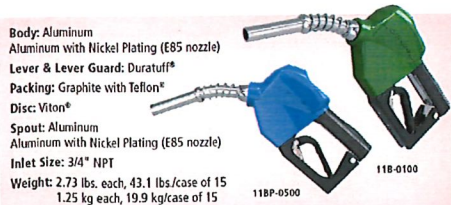

11BP® Shown with Optional Fillgard™



Click to view alternate images.

## Products

### › Retail Fueling Products

[Piping & Containment Systems](#)

[Underground Storage Tank Equipment](#)

[Standard Dispensing Equipment](#)

[Automatic Nozzles - Gas Station](#)

[Automatic Nozzles - Bulk Fueling](#)

[Manual Nozzles - Aircraft, Bulk, General and Accessories](#)

[Swivels and Breakaways](#)

[Island Accessories](#)

[VR and Balance ConVRsion Packages](#)

[Stage II Vapor Recovery Equipment](#)

[DEF/AdBlue Handling Hardware](#)

[AST Equipment](#)

[CleanEnergy Fueling Products](#)

## Other Product Families

[Chemical & Industrial Products](#)

[Transportation Products](#)

[Vehicle Wash Solutions](#)

## Contact OPW

First name\*

## Features & Benefits

### Safe for Use

- UL- and ULc-Listed for use in gasoline, diesel and up to 85% ethanol blends. [See specific listings.](#)
- No-pressure, no-flow feature helps prevent spills in pre-pay and cardlock systems (11B & 11BP).
- Prevents the consumer from jamming the nozzle in an open position with a blocker on the lever guard.
- FlowLock™ allows the nozzle to shut off when falling out of a vehicle and is tipped up, limiting spillage and unsafe conditions.

### Durable and Long-Lasting Design

- Lab cycle-tested and proven to last longer than 1 million cycles – better than any other nozzle available on the market.
- 100% of the nozzles tested to UL requirements.
- Durable lever guard that won't scratch your customers' vehicles – made from Duratuff®.
- Long-lasting hold-open clip spring.

### Appealing to Customers

- Easy to use – utilizing Accu-Stop® to-the-penny Flow Control Technology.
- Attractive 2-Piece NEWGARD™ Hand Insulator – the most comfortable nozzle in the industry to use.
- Convenient – one-finger hold-open clip that is easy to set the flow rate (not on all models).

### Design working pressure

- 50 psi (3.45 bar) maximum pressure.

### Materials

- **Body:** Aluminum, Aluminum with Nickel Plating (E85 nozzle)
- **Lever & Lever Guard:** Duratuff®
- **Packing:** Graphite with Teflon®
- **Disc:** Viton®
- **Spout:** Aluminum, Aluminum with Nickel Plating (E85 nozzle)
- **Inlet Size:** 3/4" NPT
- **Weight:** 2.73 lbs. each, 43.1 lbs./case of 15, 1.25 kg each, 19.9 kg/case of 15

### Performance

Last name\*

Email\*

Company name

Phone number

Country\*

Please Select



OPW Department Inquiry\*



- Customer Service

- Sales

- Field Technical Support

How can OPW Help Enhance Your Business?

SUBMIT

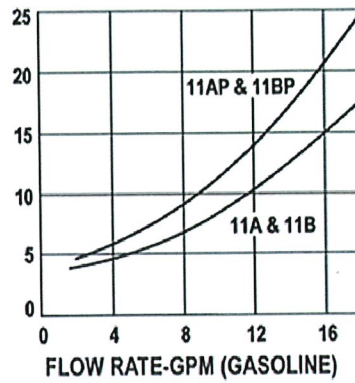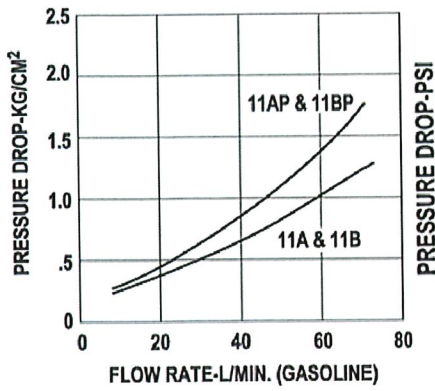

## Listings and Certifications





OPW  
a DOVER company

Copyright © 2009-2026  
OPW, A Dover Company



[CAREERS](#)
[PRIVACY POLICY](#)
[COOKIE POLICY](#)
[TRANSPARENCY IN SUPPLY CHAINS DISCLOSURE](#)
[LKSG POLICY STATEMENT](#)

[CONFLICT MINERALS](#)
[SAFETY RECALLS](#)
[COMPANY EMAIL](#)

**OPW CORPORATE HEADQUARTERS**

9393 Princeton-Glendale Road  
Hamilton, Ohio, USA 45011