

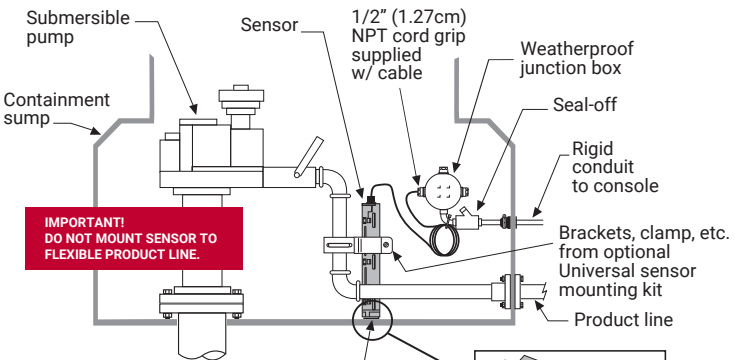




<b>Sensor Description</b>	<b>Position Sensitive Sensor</b>	This sensor is installed in a containment sump or dispenser pan and will detect the presence of liquid in the sump.				
<b>Part Number</b>	<b>794380-323</b>					
<b>Category</b>	<input type="checkbox"/> Discriminating <input checked="" type="checkbox"/> Non-Discriminating <input checked="" type="checkbox"/> Position Sensitive		<input type="checkbox"/> Level Sensing <input type="checkbox"/> Static Testing <input type="checkbox"/> Hydrostatic		 	
<b>Fuel Compatibility</b>	<input checked="" type="checkbox"/> Gas <input checked="" type="checkbox"/> Diesel <input checked="" type="checkbox"/> Kerosene <input checked="" type="checkbox"/> Jet Fuel <input checked="" type="checkbox"/> Aviation Gas	<input checked="" type="checkbox"/> E-15 <input checked="" type="checkbox"/> E-85 <input checked="" type="checkbox"/> E-100 <input checked="" type="checkbox"/> Bio-Diesel 20 <input type="checkbox"/> Bio-Diesel 100	<input checked="" type="checkbox"/> Green Diesel <input type="checkbox"/> DEF <input checked="" type="checkbox"/> Waste Oil <input checked="" type="checkbox"/> Motor Oil			
<b>Console Compatibility (*International Only<sup>1</sup>)</b>	<b>Recommended Min. Console Software</b>	<b>Sensor Interface Modules</b>				
		<b>Module Part #</b>	<b>Module Description</b>	<b># of Modules per Console</b>	<b># of Sensor Inputs per Module</b>	
TLS-450PLUS (8600 Series)	6A or Higher	332812-001	Universal Sensor Module (USM)	Up to 4 - TLS-4XX Up to 8 - TLS-4XX w/ opt. TLS-XB	16	
TLS-450	4A or Higher					
TLS4 (8601 Series) <sup>1</sup>	6A or Higher	330020-750	Universal Sensor Input Output Module (USIOM-AC)	1	12	
TLS4i (8601 Series)					6	
TLS4B (8601 Series) <sup>1</sup>						8
TLS4c (8601 Series)			330020-751			8
TLS-350/R/PLUS	124/324 or Higher	329358-001	Interstitial Sensor Interface Module	Up to 8	8	
TLS-350J		329356-003	4 Probe / 4 Sensor Interface Module	1	4	
TLS-300i		330230-001	4 Probe / 8 Sensor Interface Module		8	
TLS-300C		330513-001	2 Probe / 8 Sensor Options		Included	
<b>Alarm Notification</b>	Normal	Sensor in Normal State - No liquid detected				
	Sensor Out	Sensor not resting on bottom of containment or sensor not communicating to ATG/Console				
	Fuel Alarm	Liquid detected in containment area at approx. 1.5" (3.81cm)				
<b>Installation Kit</b>	330020-012	Universal Sensor Mounting Kit (Sold separately)				
<b>Specifications</b>	<b>Example Installation</b>					
Operating Principle	Product Permeable, Reed Switch /Float					
Product Activation Height	Liquid - Approx. 1.5" (3.81cm)					
Operating Temperature	+32 to +140°F (0 to +60°C)					
Dimensions	12" (30.5cm) high, 2.2" (5.6cm) dia.					
Miscellaneous/Notes	Standard Cable Length: 12ft (3.66m).					
Third Party Evaluation Links	<a href="#">TLS-3XX/TLS-450 Series Consoles</a> <a href="#">TLS4 (8601Series) Consoles</a>					
Product Link	<a href="#">Position Sensitive Sensor</a>					
Warranty with System	1 Yr Parts & Labor					
Warranty (When purchased separately)	1 Yr Parts Only					
<b>Where Used (Typical)</b>	<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <input checked="" type="checkbox"/> Dispenser Pan  <input checked="" type="checkbox"/> Spill Containment  <input checked="" type="checkbox"/> STP Sump                 </div> <div style="width: 45%;"> <input type="checkbox"/> Convault Tank  <input type="checkbox"/> Annular Space  <input type="checkbox"/> Monitoring Well  <input type="checkbox"/> Oil/Water Separator Tank                 </div> </div>					
		 <p><b>IMPORTANT! DO NOT MOUNT SENSOR TO FLEXIBLE PRODUCT LINE.</b></p> <p><b>IMPORTANT! Housing must compress position indicator against bottom of the sump or you will have a 'Sensor Out' alarm.</b></p> <div style="display: flex; justify-content: space-around;"> <div style="text-align: center;">  <p>Incorrect</p> </div> <div style="text-align: center;">  <p>Correct</p> </div> </div>				

# Notice

---

Veeder-Root makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

**Veeder-Root shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this publication.**

Veeder-Root reserves the right to change system options or features, or the information contained in this publication.

This publication contains proprietary information which is protected by copyright. All rights reserved. No part of this publication may be photocopied, reproduced, or translated to another language without the prior written consent of Veeder-Root.

## **Example Illustrations**

Illustrations used in this guide for example sensor installations may contain components that are customer supplied and not included with the sensor. Please check with your Veeder-Root Distributor for recommended installation accessories.

## **Third Party Evaluations**

Third party evaluations of the Veeder-Root sensors contained in this application guide can be found under the Veeder-Root vendor name on the National Work Group on Leak Detection Evaluations (NWGLDE) website:

<http://www.nwglde.org>