

E85 Safe-T-Breaks®



All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation.

- Compatible with unleaded, diesel and all Ethanol blends through E85.
- Unit is lightweight, inexpensive and disposable.
- Features same instant closing dual poppet check valve design as Model 006360.
- Maximum separation of 300 lbf / 1334.5 N.



Model 006273


E85 Safe-T-Breaks®

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
006273	¾" F x ¾" F Standard Non-Reconnectable Safe-T-Break®	.30 (.13)

Construction

Body	Aluminum with Electroless Nickel Plating
Seals	Fluorocarbon
Springs	Stainless Steel
Threads	¾" / 19.1 mm NPT

006273

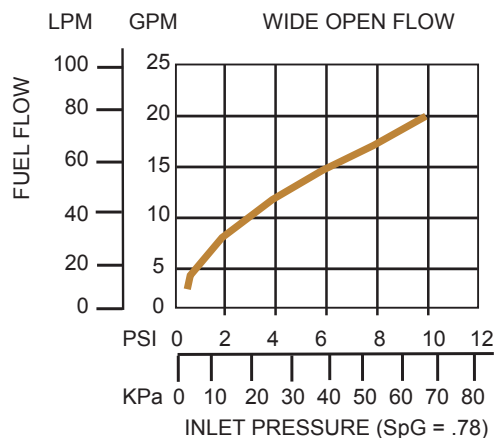

WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov



All Husky® Safe-T-Breaks® stop the flow of fuel on both sides of the separation.

Dimensions and System Options


Whip Hoses

MODEL NO.	DESCRIPTION
002274	3/4" / 19.1 mm M x 3/4" / 19.1 mm M Standard Whip Hose
002275	3/4" / 19.1 mm M x 3/4" / 19.1 mm M Standard Whip Hose with Swivel Nut

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
007000	Safe-T-Break® Drain Cup
003813	Safe-T-Break® Demonstration Kit

Model 006273

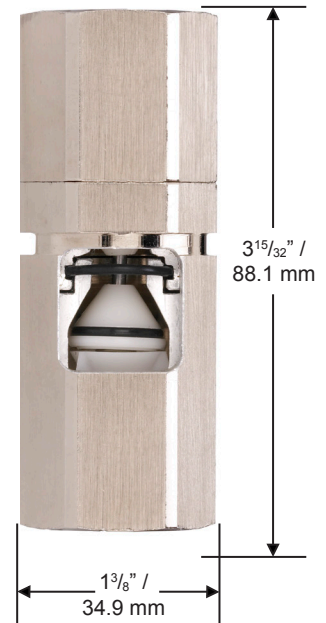

2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A. 