



WATERTIGHT FIBERGLASS TANK SUMPS

Available in either 42" or 48" diameters, Watertight Fiberglass Tank Sumps deliver maximum protection from liquid intrusion while providing easy access to submersible pumps, tank top hardware, and pipework connections. The two-piece design provides full access during installation. A pour-in-place fill channel makes connecting the sump riser to the base simple, fast, and watertight once installation is complete.




HIGHLIGHTS

- Available in single wall with options for collar-mounted base without bottom or with enclosed bottom.
- Available at a standard height of 60" and adjustable in the field down to 34" to accommodate shallow-buried tanks.
- The pour-in-place fill channel makes connecting the riser to the octagonal base quick and easy for installers with no messy, time-consuming fiberglass seam work to do.
- Fits under any 36" manway while providing a 31" diameter clear opening for easy access to equipment.
- Two-piece design eliminates confined spaces during installation by allowing the installer to assemble the pipework through the octagonal base without the sump riser in the way.
- Octagonal base and riser are constructed with eight flat panels to maximize flexibility of pipe entry locations.
- Injection molded HDPE lid with circular rib pattern for added strength.
- The lightweight lid features a side-sealing gasket that locks liquid and debris out.
- Three lid latches provide visual confirmation that the lid is appropriately seated and remains in place.
- Lid has a domed design with a tread pattern on top to assist with drainage, resist warpage, and minimize slip risk.
- Two stainless-steel retractable handles are surface-mounted to eliminate any potential leak paths into the lid.

SPECIFICATIONS


Components

- 1 Lid with side-sealing gasket
- 2 Riser
- 3 Base
- 4 Lid latches
- 5 Fill channel
- 6 Collar with open bottom
- 7 Retractable handles

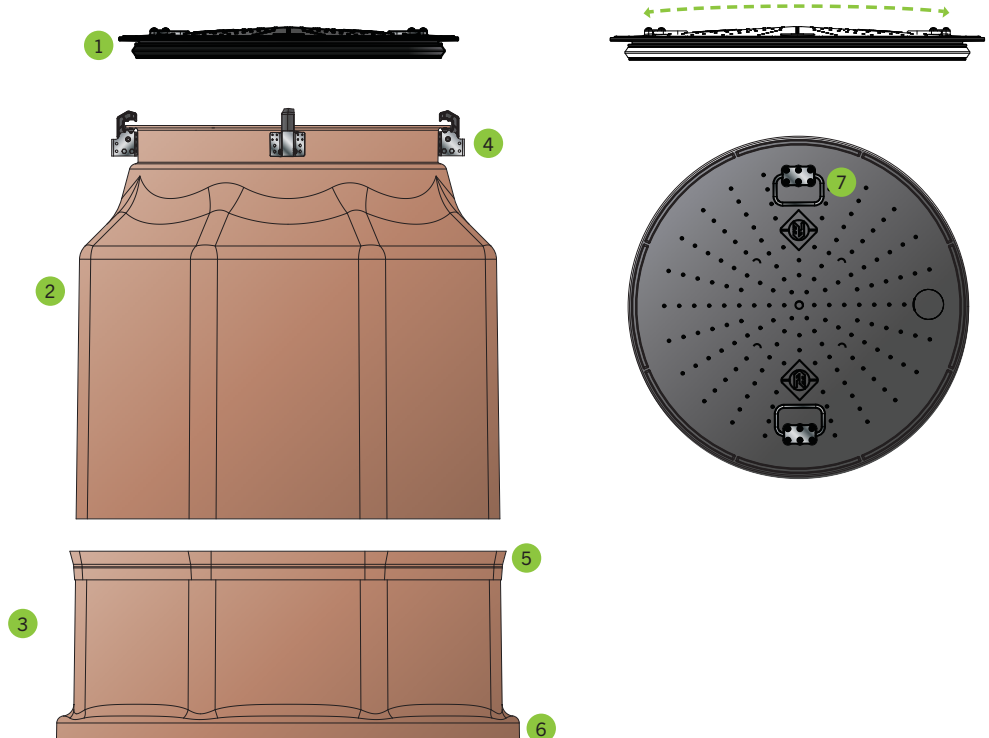


SPECIFICATIONS CONTINUED

42" Watertight Fiberglass Tank Sump Dimensions

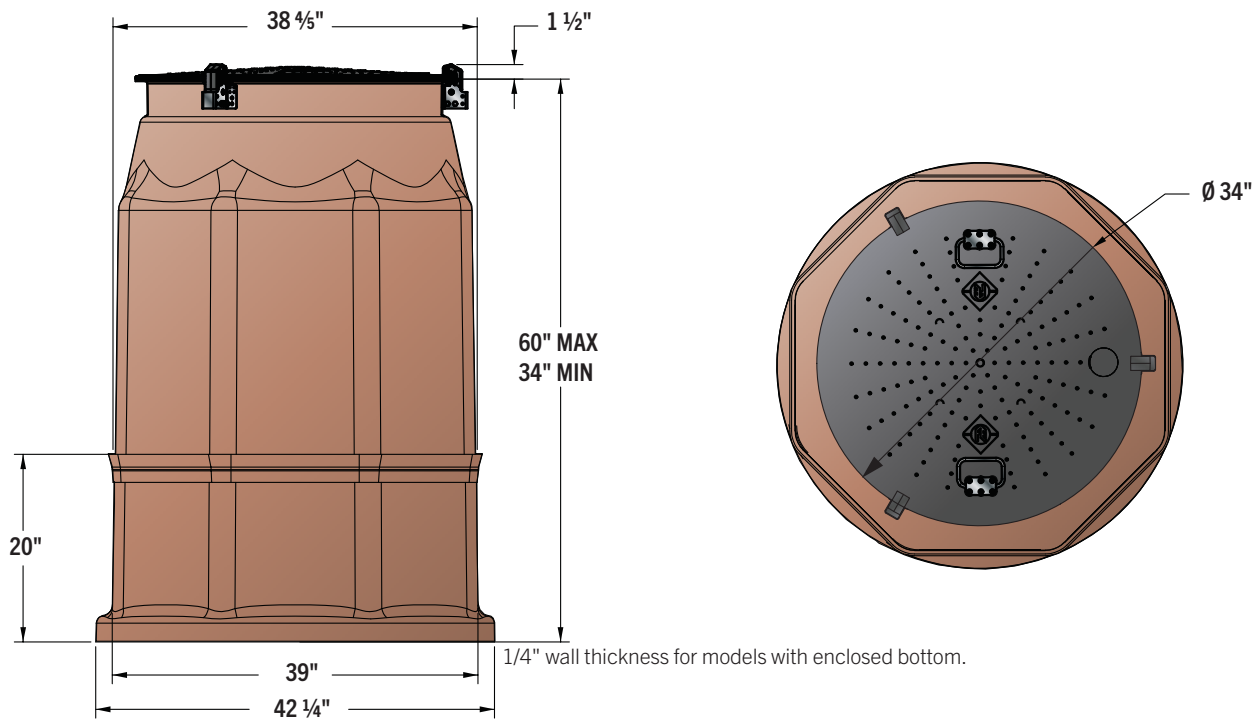

48" Watertight Fiberglass Tank Sump Dimensions

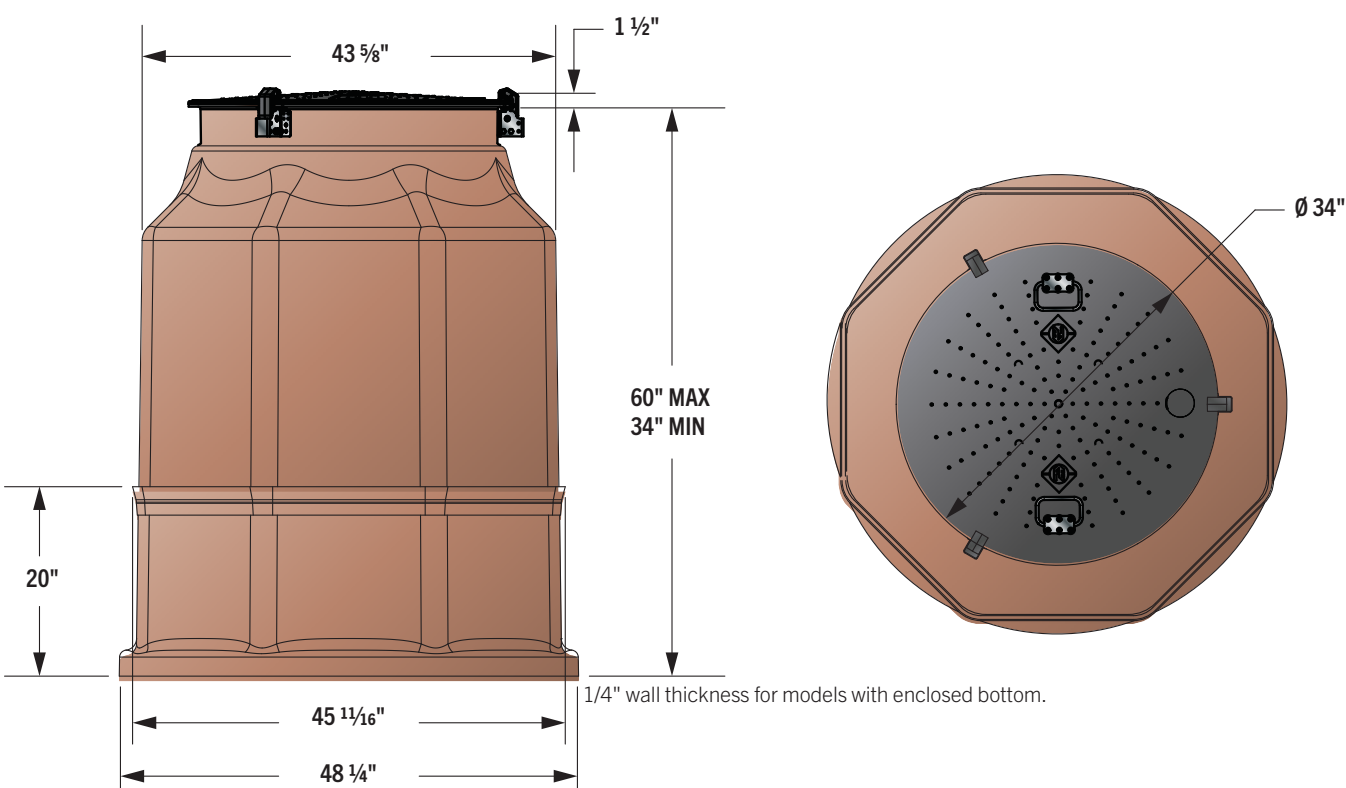

ORDERING INFORMATION

Watertight Fiberglass Tank Sumps

Model	Description
602402922	42" watertight fiberglass tank sump, collar mount, includes base, riser, and lid
602402932	42" watertight fiberglass tank sump, with bottom, includes base, riser and lid
602402901	48" watertight fiberglass tank sump, collar mount, includes base, riser, and lid
602402911	48" watertight fiberglass tank sump, with bottom, includes base, riser and lid

Note: Each tank sump requires (1) pour-in-place slurry kit and (1) collar mount seam kit shown below.



Watertight Fiberglass Tank Sump Installation Tools



Model	Description
602366924	Pour-in-place slurry kit includes: (1) gallon resin, (1) pint catalyst, gloves, mixing stick, sand paper

Note: One kit required per tank sump.



Model	Description
602366901	Collar mount seam kit includes: (2) wooden stir sticks, (2) pair rubber gloves, (3) quart containers of resin, (4) tubes of catalyst, (2) rolls of fiberglass reinforced plastic (FRP) mat, 6" x 27", (1) quart container of putty, (1) plastic putty mixing knife

Note: One kit required per tank sump.



Model	Description
602366933	Installation accessories kit includes: (1) FRP roller, (2) plastic putty mixing knives, (2) wooden stir sticks, (1) scissors, (4) pair rubber gloves, (6) brushes

Note: One kit required per site.

Watertight Fiberglass Tank Sump Replacement Parts



Model	Description
10000025010	Replacement Watertight Tank Sump lid with gasket
602390001	Replacement gasket for Watertight Tank Sump lid



Model	Description
602395930	Replacement latch assembly with adhesive
602395940	Replacement latch only