




**Franklin Fueling Systems**

DISPENSING SYSTEMS

# OUR BEST HOSE FITTINGS EVER

We've completely re-designed the end fittings on our most popular FLEX-ING™ brand hoses to deliver you a durable, reliable, and safe fuel hose solution.

**Check out our enhanced design.**

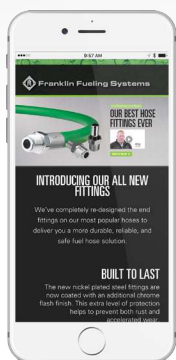

Watch the video and learn more at:  
[go.franklinfueling.com/hose-fittings](http://go.franklinfueling.com/hose-fittings)

# ALL NEW HOSE FITTINGS

These new fittings and their enhanced design features can be found on Hardwall, Softwall, Cold Weather and Marina hoses.

## BUILT TO LAST

The new nickel plated steel fittings are now coated with an additional chrome flash finish. This extra level of protection helps to prevent both rust and accelerated wear.

## BETTER CONNECTIONS


Our fittings now feature a longer thread with a more exacting taper to ensure a liquid-tight connection that will not bottom out before full tightening.

## TEST, TEST, & TEST AGAIN

Current UL pull testing requirements are set at 400 lbs. Our fittings exceed our internal benchmark of **700 lbs of pull force** in lab testing. The swivels also successfully withstood over **100,000 rotations** in testing to simulate excessive wear. Additionally, we **pressure test** and **continuity test** every hose before it leaves the factory to give you complete confidence that our hoses will perform in the field.

## ADDED ASSURANCE

With the new design, the ① **swivel fitting insert** features a ② **lip** that sits outside of the ③ **swivel nut**. This keeps the fitting body ④ **securely in place**, resisting pull-out from the ⑤ **hose ferrule**.

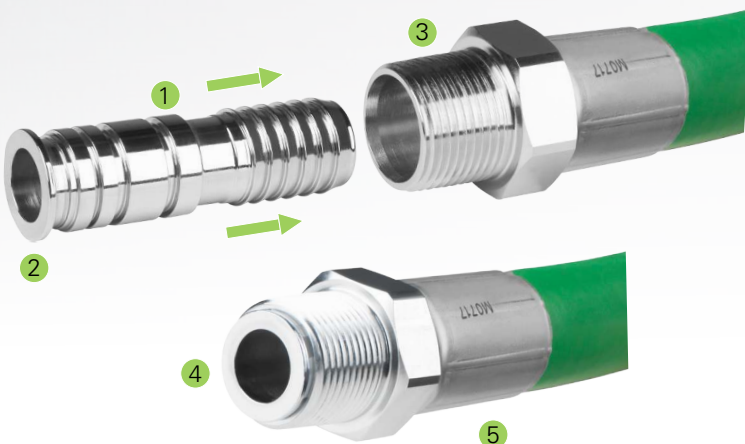

The new swivel nut is locked in place by the swivel fitting insert to resist pull-out.

franklinfueling.com

3760 Marsh Rd. • Madison, WI 53718, USA  
Tel: +1 608 838 8786 • Fax: +1 608 838 6433  
Tel: USA & Canada +1 800 225 9787 • Tel: UK +44 (0)1473 243300  
Tel: Mex 001 800 738 7610 • Tel: FR +33 (0)1 69 21 41 41 • Tel: CH +86 10 8565 4566

FFS-0607 04-17 © 2017 Franklin Fueling Systems. All Rights Reserved.