

# Standard FireShield Products




## FSMM - Male x Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
*3/4	150	1-3/4	12, 15, 18, 24, 30
*1	150	4	12, 15, 18, 24, 30
*1-1/2	150	4-1/2	12, 15, 18, 24, 30
*2	150	6	12, 15, 18, 24, 30
3	150	9	12, 15, 18, 24, 30



## FSM2M - 1-1/2" Male x 2" Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
*1-1/2	150	4-1/2	12, 15, 18, 24, 30

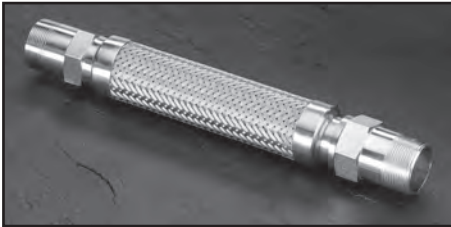

## FSMS - Male x Male Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30




## FSMF - Male x 2" Female

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
*1-1/2	150	4-1/2	12, 15, 18, 24, 30
*2	150	6	12, 15, 18, 24, 30



## FSFS - 2" Female x Male Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30

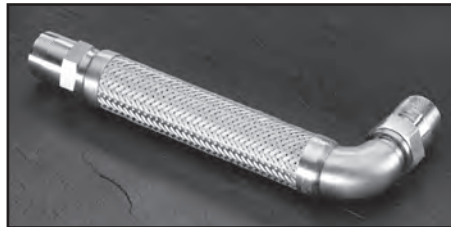

## FSMSE - Male x 90° Male Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30



### Swivel Adaptor - ACSWA

Plated swivel adapter converts the integral hex male to a swivel end. This unique adapter creates a positive metal-to-metal seal when used with Hose Master's exclusive 30° chamfered hex male fitting. This swivel adapter facilitates installation and is only compatible with Hose Master's FireShield connectors.




### Anode - ACANO

Underground connectors used with our anode comply with EPA regulations for buried metal components. Our easily monitored system


also meets NACE RP-01-69 standards for cathodic protection.

# Standard FireShield Products

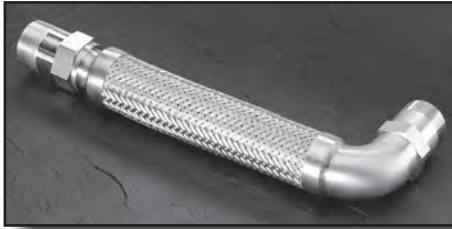

## FSSME - Male Swivel x 90° Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30

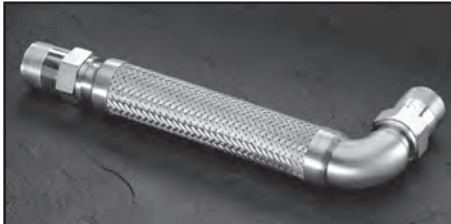


## FSSSE - Male Swivel x 90° Male Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30



## FSSWE - Male Swivel x 90° Female Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30
2	50	6	12, 15, 18, 24, 30

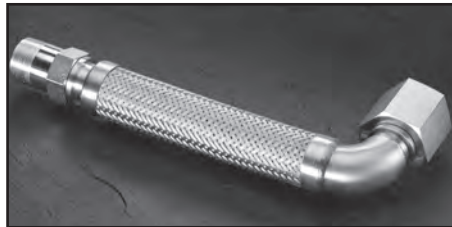

## FSS2WE - Male Swivel x 2" 90° Female Swivel

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	12, 15, 18, 24, 30



## FSMU - Male x Union

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
*3	50	9	12, 15, 18, 24, 30




## FSUU - Union x Union

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
*3	50	9	12, 15, 18, 24, 30

\* Flex connectors available with 100% stainless steel construction for even wider compatibility with evolving fuel blends. Customers may indicate their preference for a 100% stainless flex connector for qualifying constructions by adding a "-SS" suffix to the part number.

# FireShield QuickClamp Assemblies


FireShield QuickClamp assemblies make tight flex connector installations as easy as possible. Offered with a multitude of end connections (including FRP fittings) and custom hose lengths, FireShield QuickClamp assemblies offer installers the ability to fasten one or both ends of a connector within a piping system with minimal use of tools - eliminating timely labor costs and increasing profits.

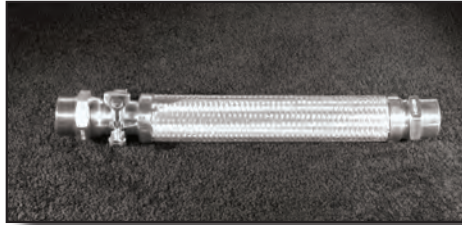

### FSQM - Hex Male x QuickClamp Hex Male


Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30
2	50	6	18, 24, 30
3*	50	9	18, 24, 30

\*features carbon steel male and hex wrench pad

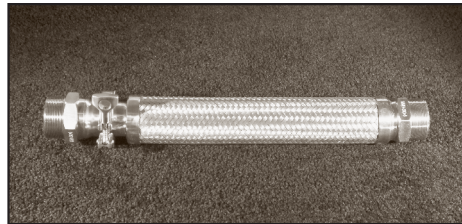


### FSQ2M - 2" Male x QuickClamp Hex Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30

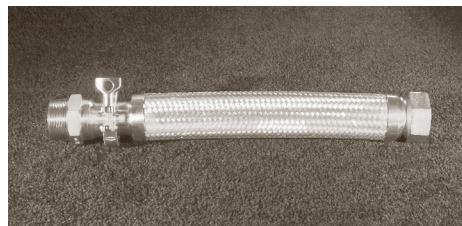


### FSQF - 2" Female x QuickClamp Hex Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30

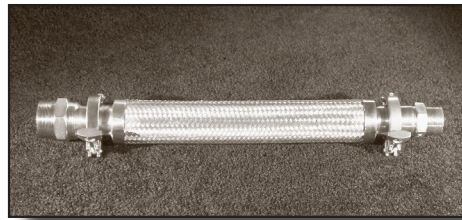


### FSQQ - QuickClamp Hex Male x QuickClamp Hex Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30
2	50	6	18, 24, 30
3	50	9	18, 24, 30

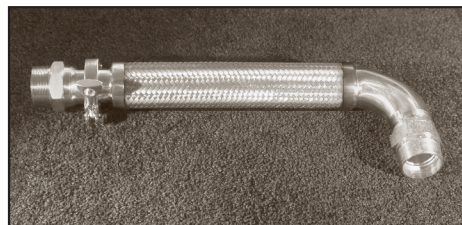

### FSQSE - 90° Male Swivel x QuickClamp Hex Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30
2	50	6	18, 24, 30

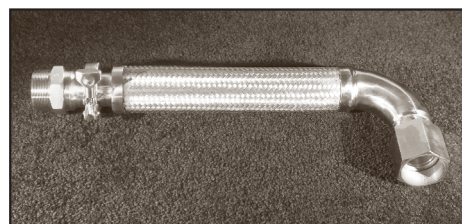

### FSQWE - 90° Female Swivel x QuickClamp Hex Male

Hose Diam. (in.)	Working Pressure (p.s.i.)	Minimum Bend Radius (inches)	Standard Lengths (inches)
1-1/2	50	4-1/2	18, 24, 30
2	50	6	18, 24, 30

- ACQSeal & ACQClamp are included with all FireShield QuickClamp assembly styles
- Overall length is measured from end to end including QuickClamp adapter