
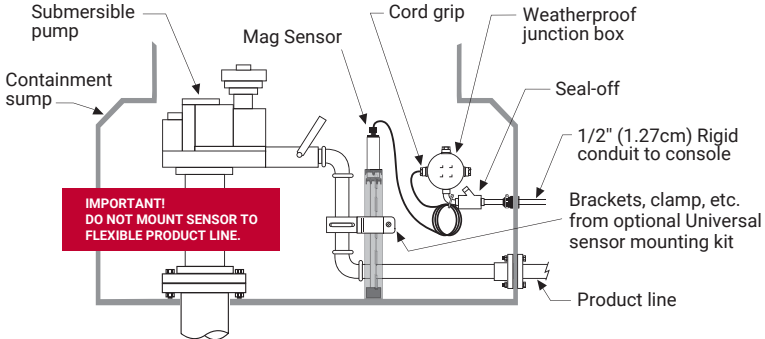


Sensor Description	Magnetostrictive Discriminating Level Indicating Containment Sump Sensor		This type of sensor is installed in a dispenser pan or containment sump and will detect the presence of, and differentiate between, fuel and other liquids.			
Part Number	857080-111 (12"/30.48cm), -112 (24"/60.96cm) / 857080-211 (12"/30.48cm), -212 (24"/60.96cm). The -211 and -212 sensors are capable of performing a Sump Integrity Test.					
Category	☒ Discriminating ☐ Non-Discriminating ☒ Position Sensitive			☒ Level Sensing ☒ Static Testing ☐ Hydrostatic		
Fuel Compatibility	☒ Gas ☒ Diesel ☒ Kerosene ☒ Jet Fuel ☒ Aviation Gas			☒ E-15 ☒ E-85 ☒ E-100 ☒ Bio-Diesel 20 ☒ Bio-Diesel 100		
						
Console Compatibility (*International Only ¹)	Recommended Min. Console Software	Sensor Interface Modules				
		Module Part #	Module Description	# of Modules per Console	# of Sensor Inputs per Module	Availability
TLS-450PLUS (8600 Series)	6A or Higher	332812-001	Universal Sensor Module (USM)	Up to 4 - TLS-4XX Up to 8 - TLS-4XX w/ opt. TLS-XB	16	Sold Separately
TLS-450	4A or Higher					
TLS4 (8601 Series) ¹	6A or Higher	330020-750	Universal Sensor Input/Out-put Module (USIOM-AC)	1	12	Included
TLS4i (8601 Series)						
TLS4B (8601 Series) ¹		330020-751			6	
TLS4c (8601 Series)						
TLS-350/R/PLUS	124/324 or Higher (-211 and -212 sensors require 126/326 or higher)	329356-004	Smart Sensor Interface Module	Up to 8	8	Sold Separately
TLS-300i	N/A					
TLS-300C						
Alarm Notification	Normal	Sensor in Normal State - No liquid detected		Where Used (Typical) ☒ Dispenser Pan ☒ Spill Containment ☒ STP Sump ☐ Convault Tank ☐ Annular Space ☐ Monitoring Well ☐ Oil/Water Separator Tank		
	Water Alarm	Water detected at a minimum of 1.614" (2.83cm)				
	Fuel Alarm	Fuel detected 1.368" (3.47cm)				
	Sensor Comm. Alarm	Sensor not communicating to ATG/Console				
Installation Kit	330020-012	Universal Sensor Mounting Kit (Sold separately)				
Specifications			Example Installation			
Operating Principle	Magnetostrictive probe with dual floats					
Product Activation Height	Water 1.614" (4.1cm), Fuel 1.368" (3.47cm)					
Operating Temperature	-40°F to +140°F (-40°C to +60°C)					
Dimensions	2.4" (6.1cm) Diameter; 21.4" (54.4cm) Long (-111 and -211 models), 33.4" (84.8cm) Long (-112 and -212 models)					
Miscellaneous/Notes	Standard Cable Length: 10ft (3.66m)					
Third Party Evaluation Links	TLS-350/TLS-450 Series Consoles TLS4 (8601 Series) Consoles					
Product Link	Mag Sump Sensor					
Warranty with System	1 Yr Parts & Labor					
Warranty (When purchased separately)	1 Yr Parts Only					

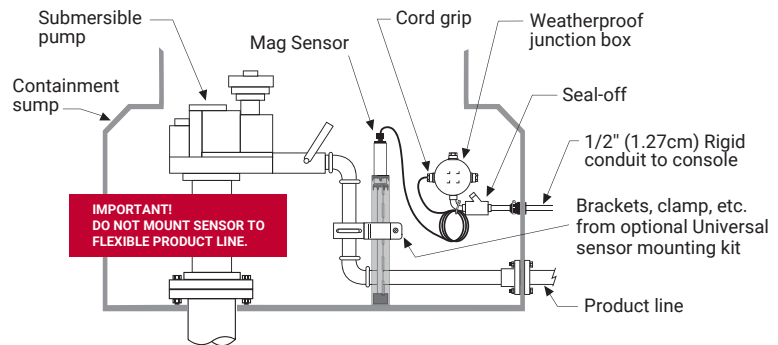

Notice

Veeder-Root makes no warranty of any kind with regard to this publication, including, but not limited to, the implied warranties of merchantability and fitness for a particular purpose.

Veeder-Root shall not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance, or use of this publication.

Veeder-Root reserves the right to change system options or features, or the information contained in this publication.

This publication contains proprietary information which is protected by copyright. All rights reserved. No part of this publication may be photocopied, reproduced, or translated to another language without the prior written consent of Veeder-Root.

Example Illustrations

Illustrations used in this guide for example sensor installations may contain components that are customer supplied and not included with the sensor. Please check with your Veeder-Root Distributor for recommended installation accessories.

Third Party Evaluations

Third party evaluations of the Veeder-Root sensors contained in this application guide can be found under the Veeder-Root vendor name on the National Work Group on Leak Detection Evaluations (NWGLDE) website:

<http://www.nwglde.org>