


Below is a document on this pump.

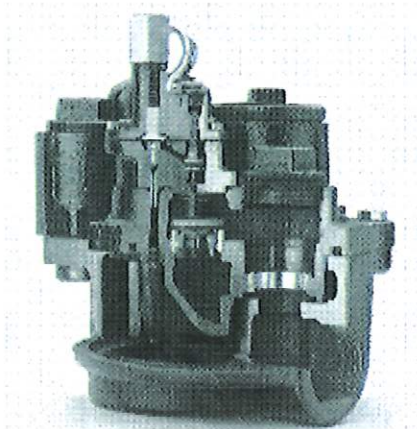

The Standard Submersible T

Design Features:

- Value alterna
- Proven perfor
- Industry stan

Designed for Hazardous Locations:

- Class 1, Group D atmospheres

Quick-Set Adjustment Range:

- T1 = 73.5" – 100.5"
- T2 = 96.5" – 130.5"
- T3 = 130.5" – 197.5"

*Assumes 1.5 HP

UL Listings: All Models of the Standard pump are UL Listed for the following Fuel Compatibility:

- 100 % Diesel
- 100 % Gasoline
- Gasoline and up to: 15% Ethanol, 15% Methanol, 20% MTBE, 20% ETBE, 20% TAME

4" Horsepowers Available:

- ½ HP, 60 HZ, 1 – phase
- ¾ HP, 60 HZ, 1 – phase
- 1½ HP, 60 HZ, 1 – phase

Fuel Compatibility:

- 100% Diesel
- 100% Gasoline
- 80% Gasoline with 20% Methanol, Ethanol, TAME, ETBE, or MTBE

Siphon Ports: 1 available – ¼ NPT on siphon check valve

Line Pressure Port: 1 Available, ¼" NPT

Vent Port: 1 Available, ¼" NPT

