


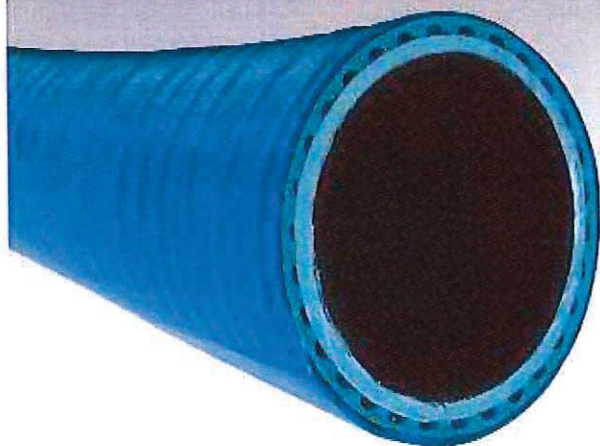

XP FLEXIBLE PIPEWORK

APT™ brand XP pipework provides a highly flexible pipework solution that makes installation simple and easy in any weather condition or site configuration. XP pipework can be used in both pressure and suction applications, and is ideal for underground service station fuel delivery systems. The XP pipework system features controlled flexibility, even in low temperatures, permitting fast, easy installation.

Highlights

- Available in 1", 1½", 1¾" and 2" diameters in a variety of coil lengths.
- The D-Series piping is a single wall, direct bury piping.
- The SC-Series piping provides additional environmental security as a secondary contained direct bury pipe.
- XP pipe features a 3 ft. bend radius for all pipe diameters making it one of the most flexible, yet durable fuel pipes available.
- No possibility of piping layer delamination due to the layered piping construction of high-grade material.
- With long coils (1000+ ft.) and simple fittings, XP pipework can be installed quickly without specialized tools in any weather.

Specifications

- Primary layer construction of Nylon 12 - the fuel line material contains no polyethylene.
- Do not store piping in direct sunlight.

Approvals/Certifications

- UL971 listed to the January 2014 standards.
- Biofuel compatible (E85 and Biodiesel).

Ordering Information

Model	Description	Ft.	Reel	Weight	
				Lbs.	Kg
XP-100-SC	1" secondary contained	250	Master	301	136
		500	Master	408	185
		2500	S. Master	1299	589
XP-100-D	1" single wall	250	Master	258	117
		500	Master	320	145
		100	Master	250	113
XP-150-SC	1½" secondary contained	250	Master	333	151
		500	Master	470	213
		1,000	S. Master	789	358
		1,500	S. Master	1061	481
		100	Master	225	102
XP-150-D	1½" single wall	250	Master	270	122
		500	Master	570	259
		1,000	S. Master	536	243
		1,500	S. Master	688	311
		100	Master	300	136
XP-175-SC	1¾" secondary contained	250	Master	405	184
		500	Master	580	263
		1,000	S. Master	1076	488
XP-200-SC	2" secondary contained	250	Master	552	250
		500	S. Master	914	415
XP-200-D	2" single wall	250	Master	427	194
		500	S. Master	664	301



Show/Hide Menu



Clamshell Non-Swivel Tee and Elbow

Installing APT™ brand XP flexible pipe inside of a narrow-base dispenser sump has never been easier. The XP pipe clamshell tee and elbow fittings allow for an easy space-saving installation by enabling an installer to connect flexible pipe directly into a shear valve riser. This eliminates the need for extra galvanized fittings. By eliminating the galvanized fittings, you also reduce the amount of potential leak points, giving you peace of mind that your installation is secure. With the tee and elbow fittings you can complete an XP pipe installation inside of a sump in less than 16" of linear space. The stainless steel design of the fittings makes them an ideal solution for any fueling application.

HIGHLIGHTS

SPECIFICATIONS

ORDER INFO

DOWNLOADS

- Ideal for retrofit installations where containment sump has limited space or a narrow base.
- Eliminate threaded pipe joints inside of containment space; freeing up valuable space in tight quarters.
- Solid stainless steel construction.
- E-coated clamps provide durability and corrosion resistance from gas/alcohol blends (including E85), diesel and biodiesel.
- NPT threads are compatible with locally available standard termination fittings.
- 100 psi rated working pressure.
- Stainless steel fittings are biofuel approved (E85 and biodiesel).

[Contact Us](#)

[Corporate](#)

[Job Opportunities](#)

[Policies](#)

[Legal Notices](#)

Franklin Fueling Systems
3760 Marsh Road
Madison, Wisconsin 53718 USA
Phone: +1 (608) 838-8786

SYSTEM SOLUTIONS





≡ Show/Hide Menu



Clamshell Non-Swivel

APT™ brand XP Pipe fittings come in a variety of options for making easy end connections with the flexible pipework system. Each fitting type has been designed to ensure the right solution for any application. XP Pipe clamshell non-swivel fittings provide the same environmental security as the swivel version at an economical price.



HIGHLIGHTS

- Solid brass or stainless steel construction.
- E-coated clamps provide durability and corrosion resistance from gas/alcohol blends (including E85), diesel and biodiesel.
- NPT threads are compatible with locally available standard termination fittings.
- 100 psi rated working pressure.
- Stainless steel fittings are biofuel approved (E85 and biodiesel).

SPECIFICATIONS

ORDER INFO

DOWNLOADS

Contact Us

Corporate

Job Opportunities

Policies

Legal Notices

Franklin Fueling Systems
3760 Marsh Road
Madison, Wisconsin 53718 USA
Phone: +1 (608) 838-8786

SYSTEM SOLUTIONS