



☰ Show/Hide Menu

## XP Flexible Pipework

APT® XP pipework provides a highly flexible pipework solution that makes installation simple and easy in any weather condition or site configuration. XP pipework can be used in both pressure and suction applications, and is ideal for underground service station fuel delivery systems. XP pipe is offered in 1", 1 1/2", 1 3/4", and 2" diameters in a variety of lengths.



### HIGHLIGHTS

### SPECIFICATIONS


### ORDER INFO

### DOWNLOADS

- Primary layer construction of Nylon 12 - the fuel line material contains no polyethylene.
- Do not store piping in direct sunlight.

## Components

1. Interior primary (Nylon 12)
2. Metallized Mylar
3. Nylon Braid
4. Exterior Primary (Nylon 12)
5. Clear Mylar
6. Secondary Jacket (Nylon 12)
7. Metallized Mylar
8. Scuff Guard (Nylon 12)

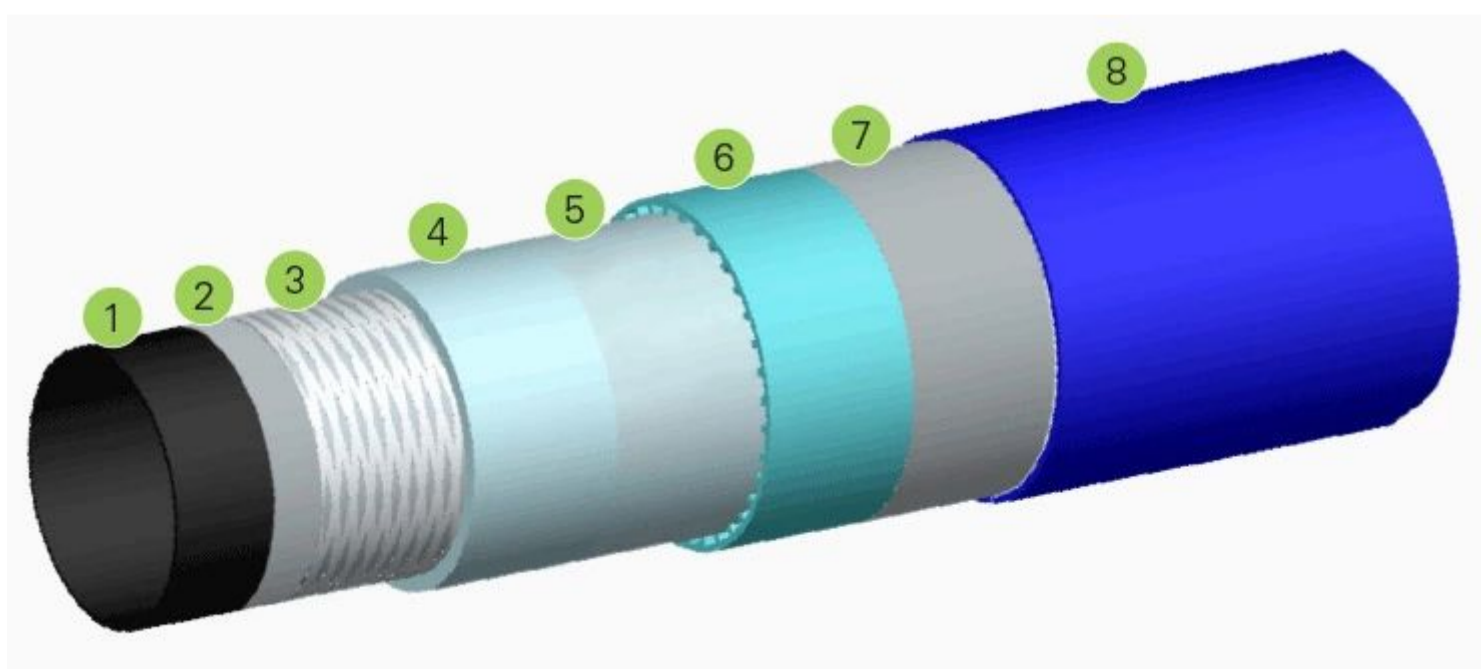

## Pipe Dimensions

Model	ID ± 0.010 Primary Layer	OD ± 0.020 Primary Layer	OD ± 0.030 SC Jacket	OD ± 0.030 Scuff Guard	Minimum Bend Radius
XP-100-D	1.00"	1.27"	n/a	n/a	36.00"
XP-100-SC	1.00"	1.27"	1.47"	1.502"	36.00"
XP-150-D	1.40"	1.70"	n/a	n/a	36.00"
XP-150-SC	1.40"	1.70"	1.90"	1.925"	36.00"
XP-175-SC	1.65"	1.95"	2.15"	2.175"	36.00"
XP-200-D	2.04"	2.45"	n/a	n/a	36.00"
XP-200-SC	2.04"	2.45"	2.65"	2.675"	36.00"

## Reel Dimensions

Listed as reel diameter × width × hub diameter.

Reel Size	Inches	cm
Master	91 × 31 × 74	231.1 × 78.7 × 188
Super master (S. Mast.)	91 × 49 × 74	231.1 × 124.5 × 188

## Approvals/Certifications

- UL971 listed.
- UL971 listed for fuels including:
  - Motor vehicle fuels typically found in consumer dispensing facilities like gasoline or diesel including blended fuels with maximum 15% MTBE, 15% Methanol or 30% Ethanol.
  - Concentrated fuels such as alternate unblended fuels containing up to 100% concentrations of Toluene, Methanol or Ethanol.
  - High blend fuels with higher than normal gasoline blends with maximum 50% Methanol or 50% Ethanol.
  - Aviation and marine specialty fuels containing up to 100% kerosene or leaded gasoline.
- Biodiesel compatibility:
  - Biodiesel up to 5% (B5)
  - Biodiesel up to 20% (B20)
  - Biodiesel at 97% - 100% (B99 / B100)
  - All ASTM defined biofuel blends

Contact Us

Corporate

Job Opportunities

Policies

Legal Notices



Franklin Fueling Systems  
 3760 Marsh Road  
 Madison, Wisconsin 53718 USA  
 Phone: +1 (608) 838-8786



©2022 Franklin Fueling Systems

