


Sensor Description		Solid-State - Non-Discriminating Containment Sump Sensor					This Solid-State, Non-Discriminating Sensor is installed typically in a containment sump area to detect the presence of a liquid. Its optical liquid level technology requires no moving parts, allowing it to operate in sub-zero temperatures.				
Part Number		794380-351									
Category		☐ Discriminating ☒ Non-Discriminating☐ Position Sensitive ☐ Level Sensing ☐ Static Testing☐ Hydrostatic									
Fuel Compatibility		☒ Gas☒ Diesel☒ Kerosene☒ Jet Fuel☒ Aviation Gas ☐ E-15☐ E-85☐ E-100☒ Bio-Diesel 20☒ Bio-Diesel 100 ☒ Green Diesel☐ DEF☒ Waste Oil☒ Motor Oil									
Console Compatibility (*International Only ¹)		Recommended Min. Console Software	Sensor Interface Modules								
			Module Part #	Module Description	# of Modules per Console	# of Sensor Inputs per Module	Availability				
TLS-450PLUS (8600 Series)		6A or Higher	332812-001	Universal Sensor Module (USM)	Up to 4 - TLS-4XX Up to 8 - TLS-4XX w/ opt. TLS-XB	16	Sold Separately				
TLS-450		4A or Higher									
TLS4 (8601 Series) ¹		6A or Higher	330020-750	Universal Sensor Input Out-put Module (USIOM-AC)	1	12	Included				
TLS4i (8601 Series)											
TLS4B (8601 Series) ¹			6								
TLS4c (8601 Series)											
TLS-350/R/PLUS		124/324 or Higher	329956-001	Type A Sensor Interface Module	Up to 8	8	Sold Separately				
TLS-350J		N/A									
TLS-300i											
TLS-300C											
Alarm Notification		Normal	Sensor in Normal State - No liquid detected								
		Fuel Alarm	Liquid detected - Approx. 1.0" (2.54cm)								
		Sensor Out	Sensor not communicating to ATG/Console								
Installation Kit		330020-012	Universal Sensor Mounting Kit (Sold separately)								
Specifications		Example Installation									
Operating Principle		Optical - Looking at phase changes in the light beams by causing them to interact or interfere with one another									
Product Activation Height		Fuel or Water - Approx. 1" (2.54cm)									
Operating Temperature		-40 to +122°F (-40 to +50°C)									
Dimensions		22.1" (56.1cm) high, 2.2" (5.6cm) dia.									
Miscellaneous/Notes		Standard Cable Length: 12ft (3.66m)									
Third Party Evaluation Links		TLS-350/TLS-450 Series Consoles TLS4 (8601 Series) Consoles									
Product Link		Solid-State Non-Discriminating Containment Sump Sensor									
Warranty with System		1 Yr Parts & Labor									
Warranty (When purchased separately)		1 Yr Parts Only									
Where Used (Typical)		☐ Dispenser Pan☒ Spill Containment☒ STP Sump ☐ Convault Tank☐ Annular Space☐ Monitoring Well☐ Oil/Water Separator Tank									

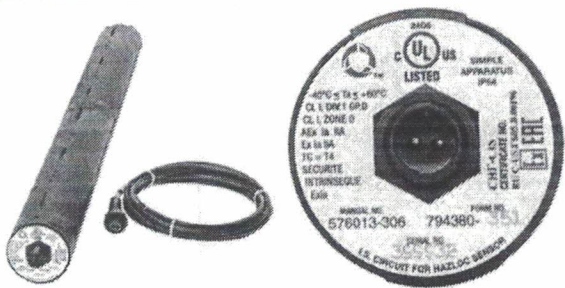