

SOLID-STATE DISCRIMINATING INTERSTITIAL SENSOR FOR FIBERGLASS TANKS




Solid-State Discriminating Interstitial Sensor

The Discriminating Interstitial Sensor for double-wall fiberglass tanks uses solid-state liquid level sensing technology to detect the presence of, and differentiate between, hydrocarbons and other liquids in the interstitial space of the tank. Prevent serious product loss, safety and environmental issues by quickly detecting leaks in fiberglass tanks.

Key Features

- Audible alarm (Fuel Alarm, Sensor Out) and displayed message
- Recorded as part of the Alarm History Report
- Durable and accurate with no moving parts to wear out or stick
- Withstands harsh, even icy conditions

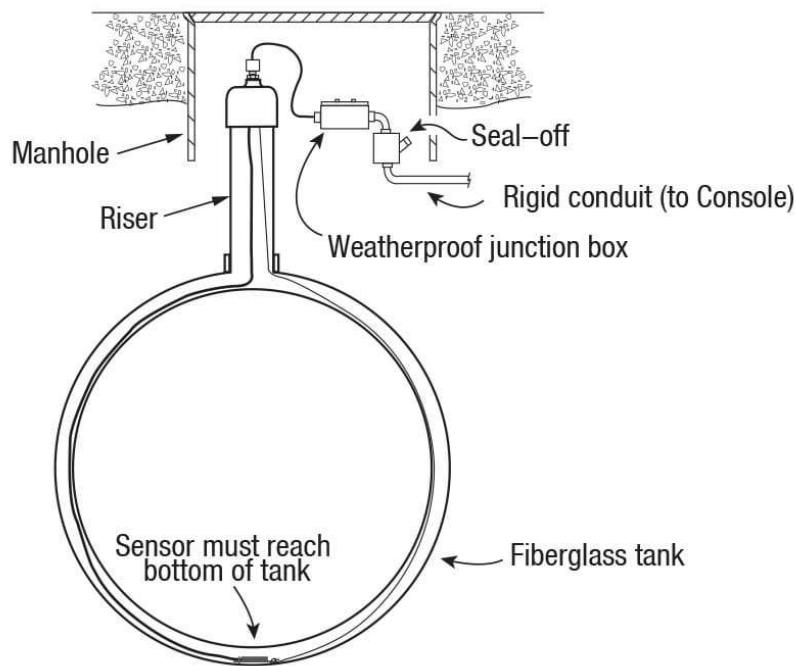

Key Benefits

- Detects and pinpoints leaks quickly, accurately
- Audible and displayed alarm is triggered when liquid reaches < 0.1" high
- Fits 4 - 10 foot inner diameter fiberglass tanks

794380-343 Solid-State Discriminating Interstitial Sensor for
Fiberglass Tanks

Specifications

Fuel Compatibility	Gas, Diesel, Kerosene, Jet Fuel, Aviation Gas, E15, Bio-Diesel 20, Bio-Diesel 100, Green Diesel, DEF, Waste Oil, Motor Oil
Alarm Notification	Normal: Sensor in Normal State – No liquid detected Liquid Alarm: Water detected Fuel Alarm: Fuel or Fuel / Water detected Sensor Out: Sensor not communicating to ATG Console
Operating Principle	Optical sensor and conductivity
Product Activation Height	Fuel or Water - <0.1" (0.25cm)
Operating Temp	-40 to +122°F (-40 to +50°C)
Dimensions	4.3" (11cm) length, 1.5" (3.8cm) width, 0.5" (1.3cm) thick
Standard Cable	25ft (7.6m)

Documents

- ↓ Solid-State Discriminating Interstitial Sensor for Double-Wall Fiberglass Tanks Specifications (577013-750-11)
- ↓ Sensor Products Application Guide (577013-750)

RELATED PRODUCTS



Non-Discriminating Interstitial Sensor for Double-Wall Fiberglass Tanks

The Non-Discriminating Interstitial Sensor for double-wall fiberglass tanks detects the presence of liquid in the interstitial space of the tank.

Learn More >



TLS-450PLUS Automatic Tank Gauge

The TLS-450PLUS automatic tank gauge provides the most comprehensive fuel site data for advanced fuel asset management.

[Learn More](#) >



Solid-State Alternative Ethanol Fluid Interstitial Sensor

The interstitial sensor for double-wall fiberglass tanks with high alcohol product uses solid-state liquid level sensing technology to detect liquid in the interstitial space of the tank.

[Learn More](#) >

REQUEST FOR QUOTE

First name*

Last name*

Company name

Email*

Phone number

Country*

Please Select

Postal Code

Product Interest*

☐

Automatic Tank Gauges

☐

Tank Gauge Sensors or
Probes

☐

Submersible Turbine
Pumps

☐

HydrX Fuel Conditioning
System

☐

DEF Submersible Turbine
Pumps

☐

Electronic Meter Registers

☐

Mechanical Meter
Registers

☐

Vapor Recovery / ISD /
Carbon Canister

☐

Additive Injective System

Request Type*

SUBMIT

Copyright © The Veeder-Root Company.
All rights reserved. Unauthorized duplication prohibited.
125 Powder Forest Drive PO Box 2003
Simsbury, CT 06070
1.800.873.3313

**Automatic Tank Gauges
(ATG)**

Meter Registers

**Red Jacket Submersible
Pumping Systems (STP)**

Careers

Technical Support

[Privacy](#) [Terms](#) [Extranet](#) [CCPA Notice](#)