



☰ Show/Hide Menu



## XP Flexible Pipework

APT® XP pipework provides a highly flexible pipework solution that makes installation simple and easy in any weather condition or site configuration. XP pipework can be used in both pressure and suction applications, and is ideal for underground service station fuel delivery systems. XP pipe is offered in 1", 1 1/2", 1 3/4", and 2" diameters in a variety of lengths.



HIGHLIGHTS

**SPECIFICATIONS**


ORDER INFO

DOWNLOADS

- Primary layer construction of Nylon 12 - the fuel line material contains no polyethylene.
- Do not store piping in direct sunlight.

### Components

1. Interior primary (Nylon 12)
2. Metallized Mylar
3. Nylon Braid
4. Exterior Primary (Nylon 12)
5. Clear Mylar
6. Secondary Jacket (Nylon 12)
7. Metallized Mylar
8. Scuff Guard (Nylon 12)

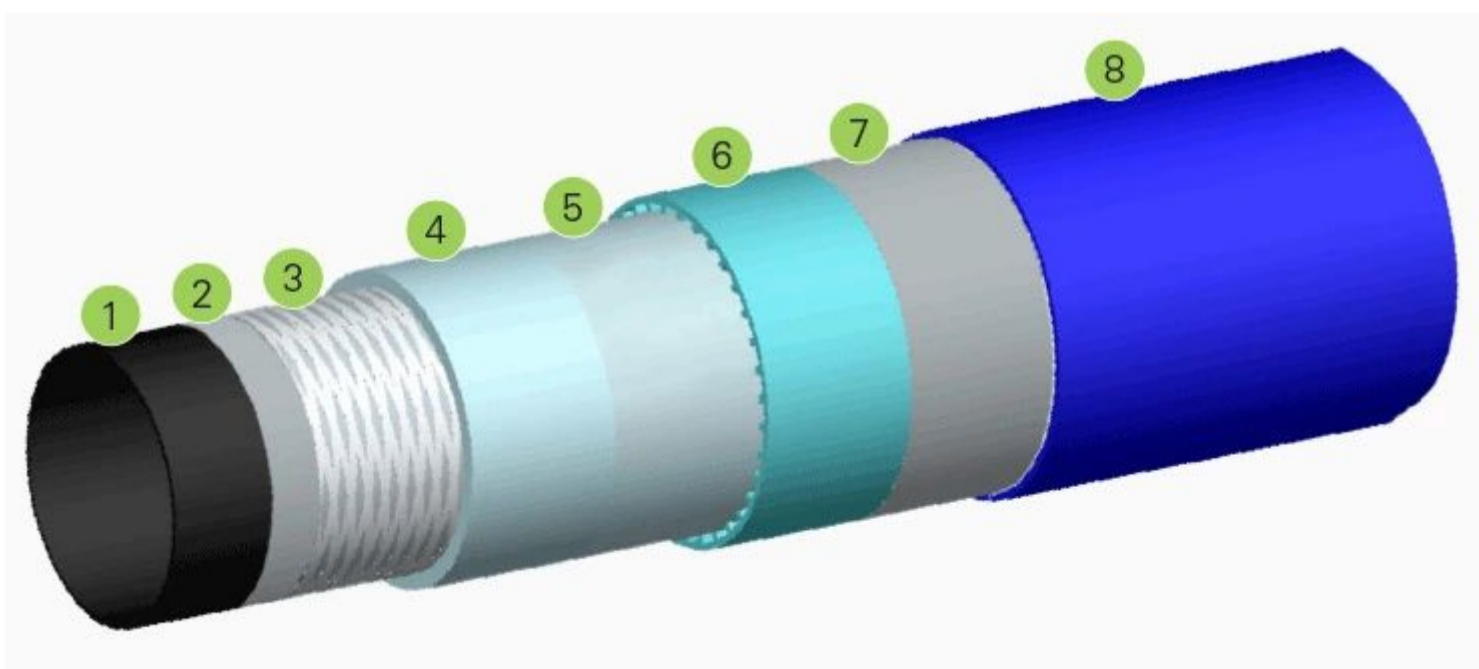

### Pipe Dimensions

Model	ID ± 0.010 Primary Layer	OD ± 0.020 Primary Layer	OD ± 0.030 SC Jacket	OD ± 0.030 Scuff Guard	Minimum Bend Radius
XP-100-D	1.00"	1.27"	n/a	n/a	36.00"
XP-100-SC	1.00"	1.27"	1.47"	1.502"	36.00"
XP-150-D	1.40"	1.70"	n/a	n/a	36.00"
XP-150-SC	1.40"	1.70"	1.90"	1.925"	36.00"
XP-175-SC	1.65"	1.95"	2.15"	2.175"	36.00"
XP-200-D	2.04"	2.45"	n/a	n/a	36.00"
XP-200-SC	2.04"	2.45"	2.65"	2.675"	36.00"

## Reel Dimensions

Listed as reel diameter × width × hub diameter.

Reel Size	Inches	cm
Master	91 × 31 × 74	231.1 × 78.7 × 188
Super master (S. Mast.)	91 × 49 × 74	231.1 × 124.5 × 188

## Approvals/Certifications

- UL971
- Biofuel compatible (E85 and Biodiesel).

Contact Us

Corporate

Job Opportunities

Policies

Legal Notices



Franklin Fueling Systems  
 3760 Marsh Road  
 Madison, Wisconsin 53718 USA  
 Phone: +1 (608) 838-8786



©2022 Franklin Fueling Systems