


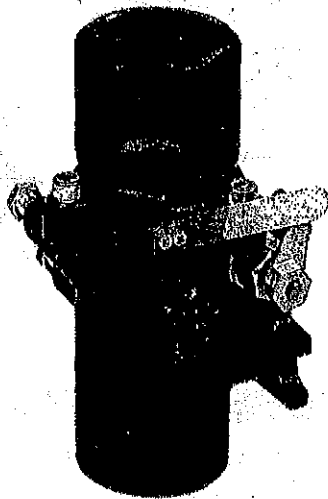

PRODUCT SHEAR VALVES

EBW® product shear valves immediately stop product flow in the event of fire or collision at the dispenser. A patented adapter shears upon impact, causing the poppet to seal on the valve body, preventing fuel spillage. If fire occurs, a fusible link releases the fulcrum arm, engaging the poppet.

HIGHLIGHTS

- Standard 1½" openings allow minimal flow restriction and a pre-drilled test plug is included for line pressure testing
- Can be boss or U-bolt mounted.
- E-coated for corrosion protection and AGB compatibility.
- Easy-to-replace adapters slide on and off valve base without lifting the dispenser.
- Adapters are available in male, female or, union connections.
- Single poppet models stop product flow from the pump. Double poppet models stop flow from the pump and dispenser piping.

SPECIFICATIONS

- Fusible link closes poppet at 165.0 °F (73.9 °C).
- Top and body material: E-coated cast iron
- Poppet and O-ring: Fluorocarbon
- Stem and poppet spring: Stainless steel

Approvals/Certifications



- Meets NFPA 30A requirements.
- UL and ULC listed. UL 842A and 842B approved for E-85 alcohol/gas blends and Biodiesel.
- ATEX approved, SIRA 13ATEX9035U.

ORDERING INFORMATION


Shear Valves

Model	Description
662500901	Single poppet shear valve, union, 1½" NPT
662500902	Single poppet shear valve, female, 1½" NPT
662500903	Single poppet shear valve, male, 1½" NPT
662510902	Single poppet shear valve, female, 1½" BSPT
662510903	Single poppet shear valve, male, 1½" BSPT
662501901	Double poppet shear valve, union, 1½" NPT
662501902	Double poppet shear valve, female, 1½" NPT
662501903	Double poppet shear valve, male, 1½" NPT
662511902	Double poppet shear valve, female, 1½" BSPT
662511903	Double poppet shear valve, male, 1½" BSPT
662502902*	Double poppet shear valve, normally closed, female, 1½" NPT

*UL listed only

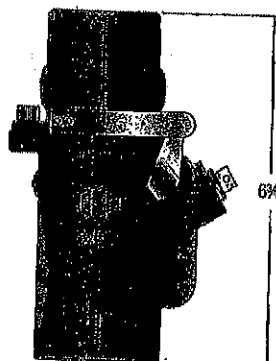

Female Double Poppet

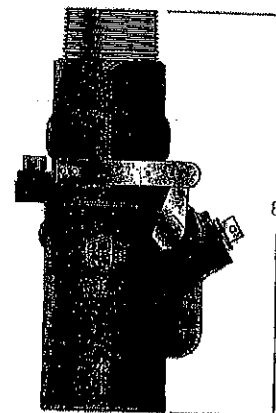

Male Double Poppet

Franklin Fueling Systems

franklinfueling.com
 3780 Marsh Rd • Madison, WI 53718, USA
 Tel: +1 608 838 8786 • Fax: +1 608 838 6433
 Tel: USA & Canada: +1 800 226 9787 • Tel: UK: +44 (0) 1474 243300
 Tel: Mex: 001 800 738 7610 • Tel: H.K.: +852 21 31741 • Tel: CH: +86 10 8566 1666



© 2018 Franklin Fueling Systems. All Rights Reserved.

FFS-0264 12-18