


Cookies: Our website uses cookies for analytics and to enable dynamic content. [Learn More](#)



Show/Hide Menu

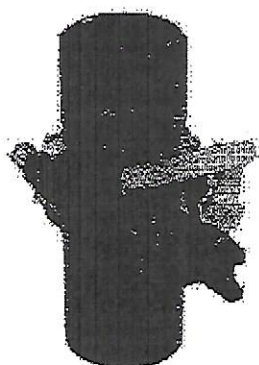

Product Shear Valves

EBW® product shear valves immediately stop product flow in the event of fire or collision at the dispenser. A patented adapter shears upon impact, causing the poppet to seal on the valve body, preventing fuel spillage. If fire occurs, a fusible link releases the fulcrum arm, engaging the poppet.

EBW® product shear valves immediately stop product flow in the event of fire or collision at the dispenser. A patented adapter shears upon impact, causing the poppet to seal on the valve body, preventing fuel spillage. If fire occurs, a fusible link releases the fulcrum arm, engaging the poppet.

HIGHLIGHTS

SPECIFICATIONS

ORDER INFO

DOWNLOADS

Collision & Fire Protection

Protect your site without sacrificing flow.

Single or Double Poppet


Single poppet models stop product flow from the pump. Double poppet models stop flow from the pump and dispenser piping.

E-Coated

Shear valves feature an E-coated body for corrosion protection.

Minimal Flow Restriction

Standard 1-1/2" NPT openings allow minimal flow restriction and a pre-drilled test plug is included for line pressure testing.

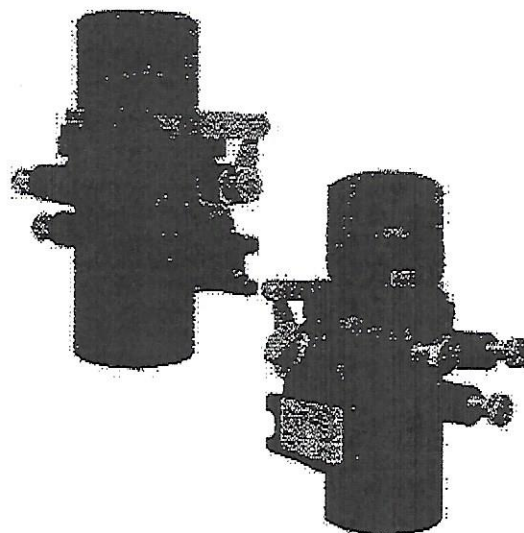

More Features

- Adapters are available in male, female or union connections.
- Single and double poppet
- The valve can be boss or U-bolt mounted.
- Fusible link closes poppet in the event of a fire (165.0 °F and 73.9 °C)
- Main poppet seals in valve body, preventing accidents when replacing adapters
- Meets NFPA 30A requirements
- AGB compatible (E-85, gasoline and biodiesel)
- UL 842A and UL 842B approved for E-85 alcohol/gas blends and biodiesel
- Easy-to-replace adapters slide on and off valve base without lifting the dispenser.