




Home › Red Jacket® Submersible Pumping Systems ›
The Red Jacket® STP Platform ›
The Red Jacket® STP Accessories ›
Red Jacket® FXV Series Mechanical Line Leak Detectors

Get a Quote

RED JACKET® FXV SERIES MECHANICAL LINE LEAK DETECTORS

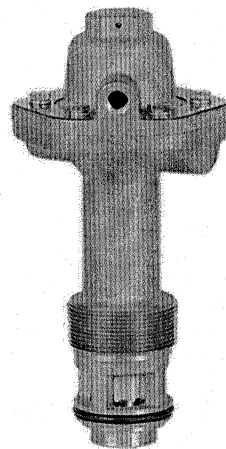

Red Jacket® FXV MLLD

Find a Distributor



restricted to the dispensers.



Red Jacket® FXV Mechanical Line Leak Detectors are built for superior performance and keeping operators in compliance – even in the most challenging environments. They offer the fastest Mechanical line leak test available for hourly monitoring – the most cost-effective and reliable means to meet U.S. Federal Environmental Protection Agency catastrophic line leak detection requirements – and are guaranteed for two full years.

FXV Leak Detectors are UL listed and third party certified to ensure quality, performance, and durability. All models of the FXV Leak Detector are UL Listed for the following Fuel Compatibility:

- 100 % Diesel
- 100 % Gasoline
- Gasoline and up to 10% Ethanol

Get a Quote



Product Form

Part Number	Description	Notes
116-056-5	Line Leak Detector Unit, FX1V, Gas	FX1V Line Leak Detector Unit
116-058-5	Line Leak Detector Unit, FX1DV, Diesel	FX1V Line Leak Detector Unit
116-057-5	Line Leak Detector Unit, FX2V, Gas	Product discontinued as of July 1, 2021
116-059-5	Line Leak Detector Unit	Product discontinued as of July 1, 2021

Find a Distributor



Features and Benefits


- UL listing = 100% diesel, 100% gasoline, gasoline and up to 10% ethanol.
- Meets EPA requirements in environments that experience extreme temperature changes.
- Robust design that works effectively in the most common and difficult testing environments.
- Adapts to applications using high-resiliency lines, such as flexible piping.
- Handles up to 11 feet of static head.
- Installs and troubleshoots without requiring special tools.
- Guaranteed to detect at a rate of 3 GPH at 10 PSI for 24 months from date of manufacture.
- Can be used with any Red Jacket or competitive submersible turbine pump.

Get a Quote



Specifications

Certification	UL Listed
Fuel Compatibility	100% Diesel (FX1DV Model), 100% Gasoline (FX1V Model), Gasoline with up to 100% Ethanol (note: UL Listed for 10% Ethanol) Gasoline, diesel, aviation fuel, solvent, and other hydrocarbon.
Types of Pipeline	Fiberglass, steel, double-wall, any rigid piping
Nominal Diameter of Pipeline	10 in. or less
Maximum Size Lines	416.7 gallons for rigid lines and

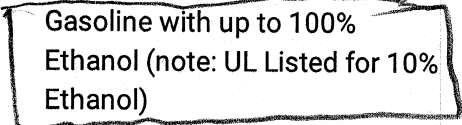

Find a Distributor